

Experimental investigations of elastic tail propulsion at low Reynolds number

Tony S. Yu, Eric Lauga, and A. E. Hosoi

Citation: *Phys. Fluids* **18**, 091701 (2006); doi: 10.1063/1.2349585

View online: <http://dx.doi.org/10.1063/1.2349585>

View Table of Contents: <http://pof.aip.org/resource/1/PHFLE6/v18/i9>

Published by the [American Institute of Physics](#).

Additional information on Phys. Fluids

Journal Homepage: <http://pof.aip.org/>

Journal Information: http://pof.aip.org/about/about_the_journal

Top downloads: http://pof.aip.org/features/most_downloaded

Information for Authors: <http://pof.aip.org/authors>

ADVERTISEMENT



**Running in Circles Looking
for the Best Science Job?**

Search hundreds of exciting
new jobs each month!

<http://careers.physicstoday.org/jobs>

physicstodayJOBS



Experimental investigations of elastic tail propulsion at low Reynolds number

Tony S. Yu, Eric Lauga,^{a)} and A. E. Hosoi

*Hatsopoulos Microfluids Laboratory, Department of Mechanical Engineering,
Massachusetts Institute of Technology, Cambridge, Massachusetts 02139*

(Received 19 June 2006; accepted 7 August 2006; published online 7 September 2006)

A simple way to generate propulsion at low Reynolds number is to periodically oscillate a passive flexible filament. Here we present a macroscopic experimental investigation of such a propulsive mechanism. A robotic swimmer is constructed and both tail shape and propulsive force are measured. Filament characteristics and actuation are varied, and the resulting data are quantitatively compared with existing linear and nonlinear theories. © 2006 American Institute of Physics.

[DOI: 10.1063/1.2349585]

At small scales, the physics of swimming is fundamentally different from that at mesoscopic scales as the dominance of viscous forces over inertial forces leads to equations of motion that are time-reversible. In his famous lecture, “Life at low Reynolds numbers,” Purcell¹ described three simple swimming mechanisms that are not time-reversible and hence lead to a net translation in the absence of inertial effects: (i) the “corkscrew,”² in which a rigid helical filament is rotated in a viscous liquid, analogous to the swimming mechanism of many bacteria;^{3,4} (ii) the “three-link swimmer,” the simplest rigid-linked mechanism that swims without inertia;⁵ and (iii) the “flexible oar,”^{6–8} in which a flexible tail is oscillated in a viscous fluid, generating traveling waves along the filament that produce a propulsive force (see also Refs. 9–11). The purpose of this Letter is to experimentally investigate the flexible oar design and to compare the resulting force data with existing theories.

Swimming at microscales has long been the realm of bacteria and other micro-organisms,^{4,12} but contemporary advances have allowed engineers to catch up with nature. Dreyfus *et al.* recently created the first man-made microswimmer,¹³ in which a chain of paramagnetic beads propagates a bending wave along the chain driven by an external magnetic field. Although construction of this remarkable swimmer was at least partially motivated by existing flexible tail theories,^{6–11} the mechanism is not a truly passive flexible tail as internal torques are applied along the length of the filament. A second experiment performed by Wiggins *et al.* measured the shape changes of a passive actin filament, oscillated at one end via optical tweezers.⁷ The shapes recorded in these trials match elastohydrodynamic theory well, however the resulting propulsive force—a key parameter in designing microscopic swimmers—was not measured. Here we propose the first experimental determination of this force and show that the linear theory due to Wiggins and Goldstein⁶ quantitatively predicts both the shape of the elastic filament and the resulting propulsive, viscous forces.

In order to experimentally quantify the propulsive characteristics of the flexible oar design, we built a robotic swimmer dubbed “RoboChlam” (after the algae *Chlamydomonas*), as is displayed in Fig. 1(a). The RoboChlam body was approximately 8 cm in length and housed a geared dc motor. The motor’s rotation was converted into an angular oscillation using a Scotch yoke and a lever [see Fig. 1(b)]. Consequently, the tail was angularly actuated: the base of the filament was fixed at the origin and the base angle was varied sinusoidally with an amplitude a_0 and a frequency ω . The voltage across the motor governed the oscillation frequency (between 5 and 0.4 rad/s), and the length of the lever controlled the amplitude of oscillation (0.814 and 0.435 rad). At the end of the lever, stainless steel wires of length 18–30 cm acted as elastic tails. Two different tail diameters were used in these experiments: $D=0.5$ and 0.61 mm, resulting in bending stiffnesses of 6.1×10^{-4} and 1.3×10^{-3} N m², respectively.

RoboChlam was immersed in high viscosity (3.18 Pa s) silicone oil to approach the low Reynolds numbers (10^{-2} – 10^{-3}) achieved by micro-organisms. Tail shapes generated by RoboChlam were imaged with a video camera at 30 frames per second and 720×480 pixels per frame. A cantilever beam anchored the device, and a pair of strain gauges on opposite sides of the beam measured beam deflection. Strain gauge readings were converted into force measurements; a no-load voltage reading was taken at the beginning and end of each trial to measure the thermal drift in the strain gauges and the accompanying circuitry. Although force data were obtained through measured deflections of the cantilever beam, this deflection was small—less than half a centimeter at the beam’s tip—thus, RoboChlam’s position was approximately fixed. Experiments showed that an angular oscillation starting with the tail at rest reached steady-state motion after approximately two periods of oscillation; the time scale associated with this decay of transients corresponds well with the transient time scales observed in our nonlinear simulations. Finally, videos of the tail shapes were digitized for comparison to simulations and theoretical predictions. Experimental data are summarized in Figs. 2, 3, and 5.

To perform a quantitative comparison of experimental

^{a)}Present address: Department of Mathematics, Massachusetts Institute of Technology, 77 Massachusetts Avenue, Cambridge, MA 02139. Electronic mail: lauga@mit.edu

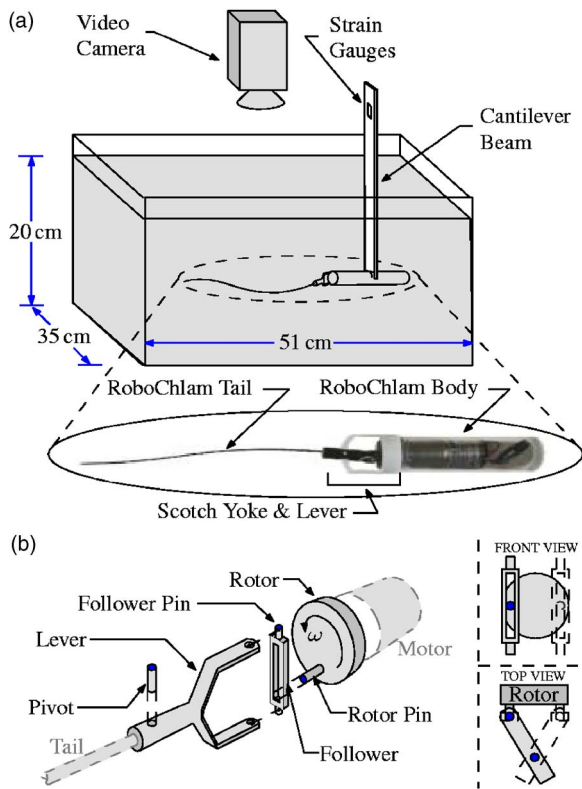


FIG. 1. (Color online) (a) Experimental setup to measure tail shapes and propulsive forces. (b) Scotch yoke and lever mechanism. The rotor and follower form the Scotch yoke, which converts the motor's rotation into a translational oscillation. This oscillation is then converted to an angular oscillation by a lever. The angular oscillation is approximately sinusoidal for a constant motor rotation.

force and shape data with theoretical predictions, we first briefly review a few key results of the theory of actuated elastic filaments in Stokes flow.⁷ Consider an elastic, cylindrical rod whose base is attached to a fixed body (see Fig. 4). In a low Reynolds number regime, the inertia of the fluid can

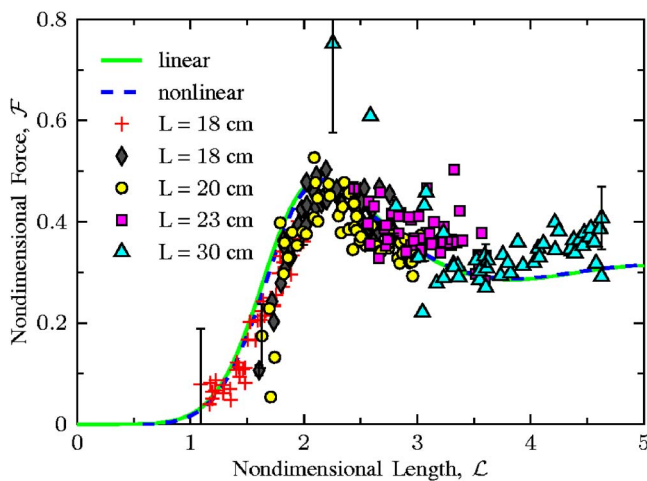


FIG. 2. (Color online) Force measurements for various tail lengths, L . Oscillation frequency was varied to span a range of dimensionless lengths, \mathcal{L} , where the dimensionless length and force are defined in Eqs. (7) and (9), respectively. The + symbols correspond to $D=0.61$ mm and $a_0=0.814$ rad. All other data correspond to $D=0.5$ mm and $a_0=0.435$ rad. There are no free parameters in the comparison between experiment and theory.

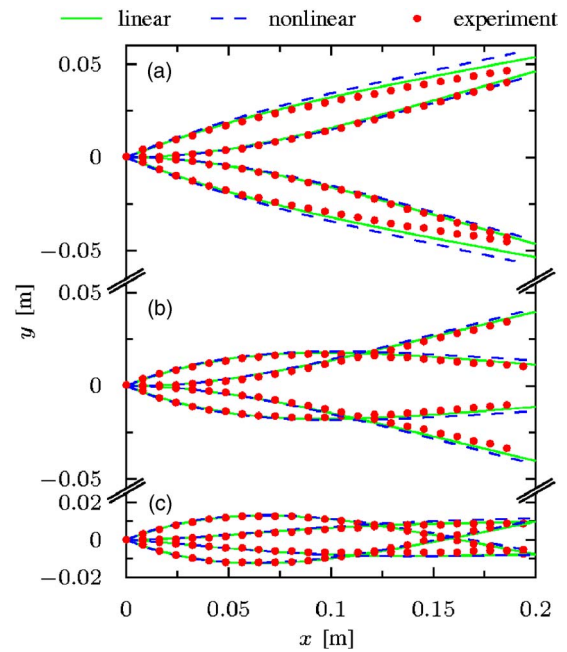


FIG. 3. (Color online) Comparison between experiment, linear, and nonlinear theories of tail shapes. Snapshots are shown at four points in the cycle for one tail with $L=20$ cm, $D=0.5$ mm, $a_0=0.435$ rad, at three different oscillation frequencies: (a) $\omega=0.50$ rad/s ($\mathcal{L}=1.73$), (b) $\omega=1.31$ rad/s ($\mathcal{L}=2.20$), and (c) $\omega=5.24$ rad/s ($\mathcal{L}=3.11$).

be neglected and the fluid dynamics is well-described by Stokes equations. If the length of the tail, L , is much greater than its diameter, D , the hydrodynamics can be further simplified by using slender body theory, the lowest order approximation of which is resistive force theory.^{12,14,15} Thus, the drag forces on the tail are linearly related to the velocity through the transverse and axial drag coefficients, ξ_{\perp} and ξ_{\parallel} , respectively, and the drag force per unit length of the rod can be expressed, for planar actuation, as

$$\mathbf{f}_d = -[\xi_{\perp} \hat{\mathbf{n}}\hat{\mathbf{n}} + \xi_{\parallel} \hat{\mathbf{t}}\hat{\mathbf{t}}] \cdot \mathbf{r}_t, \tag{1}$$

where the subscript t denotes a derivative in time, \mathbf{r} is the position vector of a point along the tail, and $\hat{\mathbf{n}}$ and $\hat{\mathbf{t}}$ are the unit normal and tangent to the filament, respectively.

The elastic forces on the rod are derived from an energy functional, which includes bending energy and an inextensibility constraint

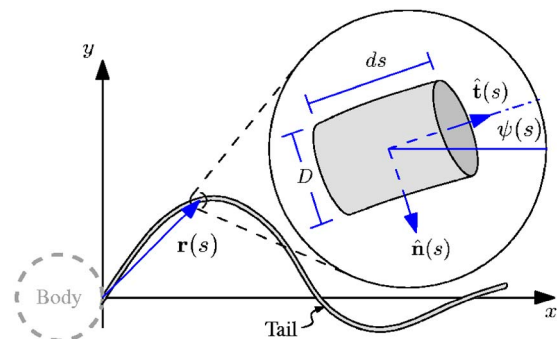


FIG. 4. (Color online) Schematic of the elastic tail with the origin defined at the base of the tail.

$$\mathcal{E} = \int_0^L \left[\frac{A}{2} \kappa^2 + \frac{\Lambda}{2} \mathbf{r}_s^2 \right] ds, \quad (2)$$

where A is the bending stiffness, κ is the local curvature of the tail, and Λ is the Lagrange multiplier enforcing inextensibility. Using calculus of variation, we obtain the elastic force per unit length, $\mathbf{f}_\epsilon = -\delta\mathcal{E}/\delta\mathbf{r}$, as given by^{16,17}

$$\mathbf{f}_\epsilon = -(A\psi_{sss} - \psi_s\tau)\hat{\mathbf{n}} + (A\psi_{ss}\psi_s + \tau_s)\hat{\mathbf{t}}, \quad (3)$$

where the subscript s denotes a derivative in the coordinate along the tail axis, ψ is the local angle (see Fig. 4), and τ can also be interpreted as the local tension in the tail.

Local mechanical equilibrium along the rod and local inextensibility lead to a pair of coupled, nonlinear partial differential equations of motion,¹⁶

$$\psi_t = -\frac{1}{\xi_\perp}(A\psi_{ssss} - \tau\psi_{ss} - \tau_s\psi_s) + \frac{1}{\xi_\parallel}(A\psi_s^2\psi_{ss} + \tau_s\psi_s), \quad (4)$$

$$\tau_{ss} - \frac{\xi_\parallel}{\xi_\perp}\tau\psi_s^2 = -A\frac{\xi_\perp + \xi_\parallel}{\xi_\perp}\psi_s\psi_{sss} - A\psi_{ss}^2. \quad (5)$$

Numerical solutions to these equations were found using a Newton-Raphson iteration and are plotted along with experimental data in Figs. 2 and 3.

For small deflections (i.e., assuming $\psi \ll 1$ such that $\psi \approx y_x$), Wiggins and Goldstein⁶ have shown that the motion of the tail can be further simplified and is described by a linear, “hyperdiffusion” equation,

$$y_t \approx -\frac{A}{\xi_\perp}y_{xxxx}, \quad (6)$$

where subscripts x and t denote derivatives in position and time, respectively. For the case of harmonic angular actuation, we apply the boundary condition $\psi = a_0 \sin(\omega t)$ at the base. The nondimensionalization of Eq. (6) is obtained by substituting $x = L\tilde{x}$, $y = a_0L\tilde{y}$, and $t = \tilde{t}/\omega$ into Eq. (6), leading to $\tilde{y}_{\tilde{t}} \approx -(\ell_\omega/L)^4\tilde{y}_{\tilde{x}\tilde{x}\tilde{x}\tilde{x}}$, where $\ell_\omega = (A/\omega\xi_\perp)^{1/4}$ is the characteristic penetration length of the elasto-hydrodynamic problem; solutions to Eq. (6) decay exponentially in space over this typical length scale. The time evolution of the tail shapes is then only a function of the angular amplitude, a_0 , and the dimensionless length,

$$\mathcal{L} = L/\ell_\omega = L\left(\frac{\omega\xi_\perp}{A}\right)^{1/4}. \quad (7)$$

This dimensionless length is the key parameter in the problem and represents the “floppiness” of the tail and hence the overall effectiveness of the swimmer. In particular, theory predicts an optimal dimensionless tail length as both short, stiff tails and long, flexible tails produce negligible net translation⁸—the first is ineffective owing to “the scallop theorem”¹ and the second owing to the excessive drag on the long passive filament.

For a tail that is periodically oscillated, Eq. (6) can be solved analytically.^{6,7} At the base of the filament, the reaction forces and torque must balance the drag forces along the tail. The opposite end of the tail is force- and torque-free such that $\psi_s = 0$, $\psi_{ss} = 0$, and $\tau = 0$ at $s = L$. For small deflections, the

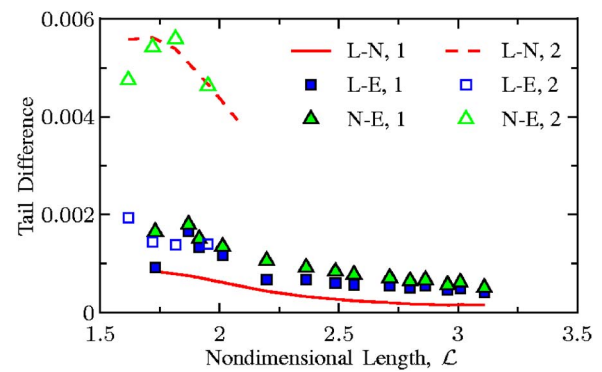


FIG. 5. (Color online) Normalized, time-averaged differences between linear (L), nonlinear (N), and experimental (E) tail shapes. The difference is calculated as the ℓ^2 norm of the vertical-distance vector between two tails divided by the tail length and the number of points along the tail. Two data sets are shown: (1) $L=20$ cm, $D=0.5$ mm, and $a_0=0.435$ rad; (2) $L=18$ cm, $D=0.61$ mm, and $a_0=0.814$ rad.

x component of local drag force, Eq. (1), can be integrated along the length of the tail to yield the propulsive force

$$\langle F \rangle \approx -A\frac{\xi_\perp - \xi_\parallel}{\xi_\perp} \left\langle y_x y_{xxx} - \frac{1}{2}y_{xx}^2 \right\rangle_{x=0}, \quad (8)$$

where $\langle \dots \rangle$ denotes averaging over one period of oscillation. Note that Eq. (8) differs from the one presented in Refs. 6 and 7 by a factor $(\xi_\perp - \xi_\parallel)/\xi_\perp$; this disparity arises from a proper integration of the drag force on the filament.⁸

In order to obtain results valid beyond the small-slope approximation, our numerical solutions to the full nonlinear system [Eqs. (4) and (5)] were employed and the propulsive force was found by numerical integration of the local drag force along the length of the tail. A dimensionless force \mathcal{F} was defined by substituting $x = \ell_\omega\tilde{x}$, $y = a_0\ell_\omega\tilde{y}$, and $t = 2\pi\tilde{t}/\omega$ into Eq. (8), such that

$$\langle F \rangle = a_0^2\ell_\omega^2(\xi_\perp - \xi_\parallel)\omega|\langle \mathcal{F} \rangle|. \quad (9)$$

Since the distance from the tail to the nearest wall was on the order of the tail’s length, drag coefficients corrected for wall effects as in Ref. 18 were used in simulations and for nondimensionalizing the force data. These wall corrections have been shown to match well with experimental results;¹⁹ for simplicity, the effect of only a single sidewall was considered. These equations produced a drag difference of approximately $\xi_\perp - \xi_\parallel = 3.35$ Pa s—about 40% greater than the drag difference without wall effects.

The results of our investigations are summarized in Figs. 2, 3, and 5. We first display in Fig. 2 the propulsive force generated for a range of dimensionless tail lengths, \mathcal{L} . All parameters of the experiment were known or measured, and no fitting of data was necessary. We obtain excellent agreement of the propulsive force with the theoretical [linear model, Eq. (6)] and numerical [nonlinear model, Eqs. (4) and (5)] values. The force data from the RoboChlam experiments show a maximum dimensionless force at $\mathcal{L} \approx 2.1$, in agreement with prediction from the theory. Note that our data were nondimensionalized with the drag difference, $\xi_\perp - \xi_\parallel$ [see Eq. (9)], instead of the transverse drag ξ_\perp , which was used in Refs. 6 and 7. The drag difference originated in Eq.

(8), and it represents the correct scaling as a tail with isotropic drag ($\xi_{\perp} = \xi_{\parallel}$) should produce zero propulsive force.^{5,8} We note also that the maximum value of \mathcal{L} that could be tested was limited by the motor's rotation rate and the length of tail that would fit in the experimental apparatus.

In comparing the data to linear elasto-hydrodynamic theories, there are three primary sources of error: wall effects, thermal drift in the experiment, and the neglected nonlinearities in the theory. The error bars in Fig. 2 arise from uncertainty in the no-load voltage of the strain gauge measurements. At lower oscillation frequencies, the sample time of the experiment increased, leading to noticeable thermal drift in strain gauge (force) measurements and thus larger drift error for the leftmost points of a given dataset. In addition, the tip of the longest tail (30 cm, Δ) was only a few centimeters from the back wall, and thus this wall had a non-negligible effect on the drag of the longest tail resulting in an increased thrust, as expected. Recall that our wall-corrected drag coefficients only account for a single wall—the side wall rather than the back wall—of the tank, as is appropriate for all but the longest tails in our experiments. It is interesting to note that, in these experiments, nonlinear effects are completely negligible relative to the other two sources of error even for long tails and large actuation angles.

In Fig. 3, we plot the tail shapes from experiments along with simulated shapes from both the linear and nonlinear theories. The plot shows three tails from a single data set (constant L , D , and a_0 , but varying ω) with dimensionless lengths (a) $\mathcal{L}=1.73$, (b) $\mathcal{L}=2.20$, and (c) $\mathcal{L}=3.11$. These dimensionless lengths span the region near the maximum dimensionless force. The tail shapes from experiment matched well with those from the linear and nonlinear simulations, and only slight differences between the three tails were observed. Tails whose dimensionless length was small [Fig. 3(a)] moved stiffly, while those with large dimensionless lengths [Fig. 3(c)] were flexible, as predicted by theory. The difference between the different tail shapes (theory, experiments, simulations) is quantified in Fig. 5. The measured errors are observed to be small. The fact that the data match the linear simulation better than the nonlinear solution is fortuitous and reflects in part the fact that resistive force theory is only an approximation of the equation of hydrodynamics.¹²

In summary, we have presented an experimental investigation of Purcell's flexible oar swimmer. Measurements of propulsive forces and time-varying shapes are in agreement with the results of resistive-force theory. Remarkably, the

small-slope model of Wiggins and Goldstein⁶ appears to remain quantitatively correct well beyond its regime of strict validity.

Our future work will investigate the efficiency of this propulsive mechanism when embedded in a synthetic free swimmer—that is, an elastic filament attached to a body that translates and rotates with the forces and torque generated by the propulsive tail. In this case, we expect swimming velocities and rotation rates to result in additional drag forces distributed along the flexible filament, thereby modifying the shape of the tail and its propulsive characteristics; this is confirmed by preliminary experiments.

The authors gratefully acknowledge the support of the National Science Foundation (CTS-0456092) and the Hock Tan Postdoctoral Fellowship.

- ¹E. M. Purcell, "Life at low Reynolds number," *Am. J. Phys.* **45**, 3 (1977).
- ²E. M. Purcell, "The efficiency of propulsion by a rotating flagellum," *Proc. Natl. Acad. Sci. U.S.A.* **94**, 11307 (1997).
- ³H. C. Berg, *E. coli in Motion* (Springer-Verlag, New York, 2004).
- ⁴D. Bray, *Cell Movements* (Garland, New York, 2000).
- ⁵L. E. Becker, S. A. Koehler, and H. A. Stone, "On self-propulsion of micro-machines at low Reynolds number: Purcell's three-link swimmer," *J. Fluid Mech.* **490**, 15 (2003).
- ⁶C. H. Wiggins and R. E. Goldstein, "Flexive and propulsive dynamics of elastica at low Reynolds number," *Phys. Rev. Lett.* **80**, 3879 (1998).
- ⁷C. H. Wiggins, D. Riveline, A. Ott, and R. E. Goldstein, "Trapping and wiggling: Elasto-hydrodynamics of driven microfilaments," *Biophys. J.* **74**, 1043 (1998).
- ⁸C. P. Lowe, "Dynamics of filaments: Modelling the dynamics of driven microfilaments," *Philos. Trans. R. Soc. London, Ser. B* **358**, 1543 (2003).
- ⁹K. E. Machin, "Wave propagation along flagella," *J. Exp. Biol.* **35**, 796 (1958).
- ¹⁰K. E. Machin, "The control and synchronization of flagellar movement," *Proc. R. Soc. London, Ser. B* **158**, 88 (1963).
- ¹¹Y. W. Kim and R. R. Netz, "Pumping fluids with periodically beating grafted elastic filaments," *Phys. Rev. Lett.* **96**, 158101 (2006).
- ¹²J. Lighthill, "Flagellar hydrodynamics—The John von Neumann lecture, 1975," *SIAM Rev.* **18**, 161 (1976).
- ¹³R. Dreyfus, J. Baudry, M. L. Roper, M. Fermigier, H. A. Stone, and J. Bibette, "Microscopic artificial swimmers," *Nature (London)* **437**, 862 (2005).
- ¹⁴J. Gray and G. J. Hancock, "The propulsion of sea-urchin spermatozoa," *J. Exp. Biol.* **32**, 802 (1955).
- ¹⁵C. Brennen and H. Winet, "Fluid mechanics of propulsion by cilia and flagella," *Annu. Rev. Fluid Mech.* **9**, 339 (1977).
- ¹⁶S. Camalet and F. Julicher, "Generic aspects of axonemal beating," *New J. Phys.* **2**, 1 (2000).
- ¹⁷C. W. Wolgemuth, T. R. Powers, and R. E. Goldstein, "Twirling and whirling: Viscous dynamics of rotating elastic filaments," *Phys. Rev. Lett.* **84**, 1623 (2000).
- ¹⁸N. J. De Mestre and W. B. Russel, "Low-Reynolds-number translation of a slender cylinder near a plane wall," *J. Eng. Math.* **9**, 81 (1975).
- ¹⁹J. F. Stalnakar and R. G. Hussey, "Wall effects on cylinder drag at low Reynolds number," *Phys. Fluids* **22**, 603 (1979).