

Commutator-free Magnus–Lanczos methods for the linear Schrödinger equation

Arieh Iserles,^{*} Karolina Kropielnicka[†] & Pranav Singh[‡]

October 3, 2017

AMS Mathematics Subject Classification: Primary 65M70, Secondary 35Q41, 65L05, 65F60

Keywords: Linear Schrödinger equation, time-dependent potentials, Commutator-free Magnus expansion, integral-preserving, Lanczos iterations, anti-commutators, Lie algebra, oscillatory potentials, large time steps

Abstract

The computation of the Schrödinger equation featuring time-dependent potentials is of great importance in quantum control of atomic and molecular processes. These applications often involve highly oscillatory potentials and require inexpensive but accurate solutions over large spatio-temporal windows. In this work we develop commutator-free Magnus expansions whose exponentiation via Lanczos iterations is significantly cheaper than that for traditional Magnus expansions. At the same time, and unlike most competing methods, we simplify integrals instead of discretising them via quadrature at the outset – this gives us the flexibility to handle a variety of potentials, being particularly effective in the case of highly oscillatory potentials, where this strategy allows us to consider significantly larger time steps.

^{*}Department of Applied Mathematics and Theoretical Physics, University of Cambridge, Wilberforce Rd, Cambridge CB3 0WA, UK.

[†]Institute of Mathematics, Polish Academy of Sciences, 8 Śniadeckich Street, 00-656 Warsaw, Poland.

[‡]Mathematical Institute, Andrew Wiles Building, University of Oxford, Radcliffe Observatory Quarter, Woodstock Rd, Oxford OX2 6GG, UK and Trinity College, University of Oxford, Broad Street, Oxford OX1 3BH, UK.

1 Introduction

We consider the linear, time-dependent Schrödinger equation (TDSE) for a single particle moving in a time-varying electric field,

$$\frac{\partial u(x, t)}{\partial t} = i \frac{\partial^2 u(x, t)}{\partial x^2} - iV(x, t)u(x, t), \quad x \in \mathbb{R}, \quad t \geq 0, \quad (1.1)$$

where the complex-valued wave function $u = u(x, t)$ is given with an initial condition $u(x, 0) = u_0(x)$. Here $V(x, t)$ is a real-valued, time-dependent electric potential, and we are working in atomic units, where Planck's constant is scaled to one ($\hbar = 1$).

These equations are of great practical importance since they allow us to study the behaviour of particles under the influence of changing electrical field. As our ability to manipulate electric fields becomes more refined, including the shaping of laser pulses, unprecedented quantum control of atomic and molecular systems is becoming possible (Shapiro & Brumer 2003). Optimal control of quantum systems is among the many challenges that require highly accurate and computationally inexpensive solutions of this equation, often involving highly oscillatory potentials over large spatio-temporal windows

1.1 Existing approaches

Time-dependent potentials significantly complicate matters insofar as numerical solutions are concerned. Typically the solution of (1.1) involves a truncation of the Magnus expansion, which is an infinite series of nested integrals of nested commutators, as we will see in this section.

Traditional methods for solving (1.1) usually commence with spatial discretisation,

$$\mathbf{u}'(t) = i(\mathcal{K}_2 - \mathcal{D}_{V(\cdot, t)})\mathbf{u}(t), \quad t \geq 0, \quad (1.2)$$

where the vector $\mathbf{u}(t) \in \mathbb{C}^M$ represents an approximation to the solution at time t , $\mathbf{u}(0) = \mathbf{u}_0$ is derived from the initial conditions, while $\mathcal{K}_2$ and $\mathcal{D}_{V(\cdot, t)}$ are $M \times M$ matrices which represent (discretisation of) second derivative and a multiplication by the interaction potential $V(\cdot, t)$, respectively.

Magnus expansions. The system of ODEs (1.2), which is of the form

$$\mathbf{u}'(t) = A(t)\mathbf{u}(t), \quad t \geq 0, \quad (1.3)$$

with $A(t) = i(\mathcal{K}_2 - \mathcal{D}_{V(\cdot, t)})$, can be solved via the Magnus expansion (Magnus 1954),

$$\mathbf{u}(t) = e^{\Theta(s, t)}\mathbf{u}(s), \quad (1.4)$$

where $\Theta(s, t) \in \mathfrak{u}_M(\mathbb{C})$ is a time-dependent $M \times M$ matrix whose exponential evolves the solution from time s to t . The Magnus expansion $\Theta(s, t)$ is obtained as an infinite series $\sum_{k=1}^{\infty} \Theta^{[k]}(s, t)$ with each $\Theta^{[k]}(s, t)$ composed of k nested integrals and $k - 1$ nested commutators (see expressions below).

In practice, we work with finite truncations of the Magnus series,

$$\Theta_m(s, t) = \sum_{k=1}^m \Theta^{[k]}(s, t),$$

and propagate the solution in suitably small time steps h ,

$$\mathbf{u}^{n+1} = e^{\Theta_m(t_n, t_n+h)} \mathbf{u}^n,$$

in order to keep the truncation error low. For the sake of simplicity, we analyse only the first step,

$$\mathbf{u}^1 = e^{\Theta_m(h)} \mathbf{u}^0, \quad (1.5)$$

writing $\Theta_m(h) = \Theta_m(0, h)$, for short¹. The first few terms of $\Theta_m(h)$ are

$$\begin{aligned} \Theta^{[1]}(h) &= \int_0^h A(\xi_1) d\xi_1, \\ \Theta^{[2]}(h) &= -\frac{1}{2} \int_0^h \left[\int_0^{\xi_1} A(\xi_2) d\xi_2, A(\xi_1) \right] d\xi_1, \\ \Theta^{[3]}(h) &= \frac{1}{12} \int_0^h \left[\int_0^{\xi_1} A(\xi_2) d\xi_2, \left[\int_0^{\xi_1} A(\xi_2) d\xi_2, A(\xi_1) \right] \right] d\xi_1 \\ &\quad + \frac{1}{4} \int_0^h \left[\int_0^{\xi_1} \left[\int_0^{\xi_2} A(\xi_3) d\xi_3, A(\xi_2) \right] d\xi_2, A(\xi_1) \right] d\xi_1. \end{aligned}$$

Remark 1 *In this paper we exclusively use the so called power-truncated Magnus expansion, see (Iserles, Nørsett & Rasmussen 2001) and (Iserles, Munthe-Kaas, Nørsett & Zanna 2000). These truncations posses, for a sufficiently smooth operator A , several crucial features: (1) fewer components of Magnus expansion ($\Theta^{[k]}(h)$) are required to obtain desired accuracy of truncations, (2) such truncations are time-symmetric, (3) since any analytic time-symmetric map S_h can be represented in the form $S_h = e^{F_h}$, where F_h is expandable in odd powers of h only, these Magnus expansions are odd in h . The last property not only leads to a gain of order of overall approximation, but also allows using fewer Gauss–Legendre quadrature points to keep the expected order of approximation. These advantages will be expounded in the sequel.*

Exponential midpoint rule. The simplest method in this family results from letting $\Theta_1(h) = \Theta^{[1]}(h)$,

$$\mathbf{u}^1 = e^{\Theta_1(h)} \mathbf{u}^0 = \exp\left(\int_0^h A(\xi) d\xi\right) \mathbf{u}^0 = \exp\left(ih\mathcal{K}_2 - i \int_0^h \mathcal{D}_{V(\xi)} d\xi\right) \mathbf{u}^0.$$

It is typical to approximate $\int_0^h \mathcal{D}_{V(\xi)} d\xi = \mathcal{D}_{\int_0^h V(\xi) d\xi}$ by taking the value of V at the middle of the integral, $\int_0^h V(\xi) d\xi \approx hV(h/2)$, and concluding with an application of the Strang splitting,

$$\mathbf{u}^1 = \exp\left(\frac{1}{2}ih\mathcal{K}_2\right) \exp\left(-ih\mathcal{D}_{V(h/2)}\right) \exp\left(\frac{1}{2}ih\mathcal{K}_2\right) \mathbf{u}^0. \quad (1.6)$$

¹The corresponding solution for any step $e^{\Theta_m(t_n, t_n+h)} \mathbf{u}^n$ can be obtained by replacing $A(\zeta)$ by $A(t_n + \zeta)$ in the Magnus expansion.

This method, called the exponential midpoint rule, is well known and has been used for a long while (Tal-Ezer, Kosloff & Cerjan 1992).

Quadrature accuracy. We note that the first truncation, Θ_1 , carries an error of $\mathcal{O}(h^3)$ (Iserles et al. 2000). Ideally it should be combined with an $\mathcal{O}(h^3)$ quadrature. However, since the *power truncated Magnus expansion* is time-symmetric, its exponential is extendable in only odd powers of h (Iserles et al. 2001). Thus even when we combine it with an $\mathcal{O}(h^2)$ Gauss–Legendre quadrature (freezing the potential at the midpoint), the error is $\mathcal{O}(h^3)$ since the $\mathcal{O}(h^2)$ terms vanish. (More generally, in our approach an $\mathcal{O}(h^{2n})$ accuracy quadrature method will automatically be considered to have an accuracy of $\mathcal{O}(h^{2n+1})$, which results in fewer quadrature points). Subsequent to freezing of the potential, we perform a $\mathcal{O}(h^3)$ Strang splitting and thus conclude that the method (1.6) has a local error of $\mathcal{O}(h^3)$.

Higher order truncations of the Magnus expansion. Once higher order accuracy is desired (Tal-Ezer et al. 1992, Kormann, Holmgren & Karlsson 2008), we need to consider higher order truncations of the Magnus expansion such as

$$\Theta_2(h) = \int_0^h A(\xi_1) d\xi_1 - \frac{1}{2} \int_0^h \left[\int_0^{\xi_1} A(\xi_2) d\xi_2, A(\xi_1) \right] d\xi_1 = \Theta(h) + \mathcal{O}(h^5).$$

Higher order truncations necessarily involve nested integrals of nested commutators. The nested integrals here need to be approximated using quadrature formulae of accuracy $\mathcal{O}(h^5)$. However, as mentioned before, it suffices to consider the Gauss–Legendre quadrature at only two nodes: $\tau_k = \frac{h}{2}(1 \pm 1/\sqrt{3})$. This results in the method

$$\mathbf{u}^1 = \exp\left(\frac{h}{2}(A(\tau_{-1}) + A(\tau_1)) + \frac{\sqrt{3}h^2}{12}[A(\tau_{-1}), A(\tau_1)]\right) \mathbf{u}^0.$$

For the Schrödinger equation (1.1), this translates to

$$\mathbf{u}^1 = \exp\left(ih\mathcal{K}_2 - ih\bar{V} + h^2 \frac{\sqrt{3}h^2}{12}[\mathcal{K}_2, \tilde{V}]\right) \mathbf{u}^0.$$

where $\bar{V} = \frac{V(\tau_{-1}) + V(\tau_1)}{2}$ and $\tilde{V} = V(\tau_{-1}) - V(\tau_1)$.

Splitting the exponential of Magnus expansions. The exponential of Θ_2 needs to be evaluated up to an accuracy of $\mathcal{O}(h^5)$. The second-order Strang splitting,

$$e^{\Theta_2(h)} = e^{\frac{1}{2}ih\mathcal{K}_2} e^{-\frac{1}{2}ih\mathcal{D}_{\bar{V}}} e^{h^2 \frac{\sqrt{3}h^2}{12}[\mathcal{K}_2, \mathcal{D}_{\bar{V}}]} e^{-\frac{1}{2}ih\mathcal{D}_{\bar{V}}} e^{\frac{1}{2}ih\mathcal{K}_2} + \mathcal{O}(h^3),$$

therefore, does not suffice. Instead we require the fourth order Yoshida splitting, obtained by composing three order-two Strang splittings.

When the exponent to be split consists of two components, the number of exponentials in an order- $2m$ Yoshida splitting grows as $2 \times 3^{m-1} + 1$. Here, we need to approximate the exponential of higher order Magnus truncations, Θ_m , which feature an increasingly larger number of terms. Consequently the number of exponentials in the Yoshida splitting for Magnus expansions grows even more rapidly.

Moreover, we are left with the problem of evaluating the exponential of commutators such as $[\mathcal{K}_2, \mathcal{D}_{\bar{V}}]$ which are expensive to compute and do not possess a structure

that allows for an easy exponentiation. In higher-order methods such as Θ_3 we start encountering commutators in a nested form.

Magnus–Lanczos schemes. An alternative approach for approximating the exponential of the Magnus expansion is via Lanczos iterations (Gallopoulos & Saad 1992), leading to the popular Magnus–Lanczos schemes. This is, arguably, a more flexible approach since we only require a method for computing matrix–vector products of the form $\Theta_n v$ in each Lanczos iteration.

Nevertheless the exponential growth resulting from the presence of nested commutators is inevitable. Moreover, the highly promising superlinear decay of error in the case of the Lanczos method for approximating the matrix exponential is not seen until the number of iterations is larger than the spectral radius of $\Theta_m(h)$ (Hochbruck & Lubich 1997), which is very large unless the time step h is suitably small.

Commutator-free, integral-free quasi-Magnus methods. To avoid the exponential growth of cost due to presence of nested commutators, many attempts have been made at deriving schemes that are entirely commutator-free. These usually proceed by replacing nested integrals in the Magnus expansion by some quadratures or Taylor expansions of V at the outset, subsequently seeking a commutator-free exponential splitting that adequately approximates the exponential of the discretised Magnus expansion. Since the Magnus expansion does not appear explicitly in these schemes, they are referred to as *quasi-Magnus*.

For example in (Alvermann & Fehske 2011), instead of the exponential of Magnus expansion, authors derive an alternative numerical propagator for Schrödinger equations. Namely a product of exponentials of linear combinations of various values of Hamiltonian operator (more precisely, values of Hamiltonian operator are taken in Gauss-Legendre quadrature points). Blanes, Casas & Thalhammer (2017), on the other hand, investigate the commutator-free expansion for differential equations of both, parabolic and hyperbolic equations, also providing stability and error analysis.

Commutator-free, integral-free Magnus–Zassenhaus splittings. In (Bader, Iserles, Kropielnicka & Singh 2016) a commutator-free integral-free numerical integrator was proposed for Schrödinger equation in the semiclassical regime. Once again, these proceed via discretisation of the integrals in the Magnus expansion. However, unlike quasi-Magnus methods where commutators are eliminated, these work by solving the commutators in the Lie algebra of anti-commutators, subsequently exploiting the idea of the symmetric Zassenhaus asymptotic splittings (Bader, Iserles, Kropielnicka & Singh 2014) for exponentiation. These have been shown to be highly effective in the semiclassical regime.

1.2 Main contributions

In this work we present *commutator-free Magnus–Lanczos methods* that

1. retain all the advantages of Magnus expansions and Lanczos methods,
2. are free of nested commutators (and the associated growth in cost),
3. feature non-nested anti-commutators which preserve skew-Hermiticity of the expansion (thus unitarity of solution and stability of the discretised method),

4. preserve the integrals intact until the very last moment of the algorithm (this enables more flexibility, higher accuracy and often lower cost while dealing with numerical integration),
5. feature fewer nested integrals (due to identities (2.11) and (2.12)). Our order six methods, for instance, feature only twice-nested integrals instead of the quadruply-nested integrals that feature in a standard Magnus expansion – not only is this beneficial for numerical quadrature, but it also makes analytic and asymptotic approximation easier.

As discussed previously, standard Magnus expansions feature nested commutators. When we need to compute $\Theta_m v$ in each Lanczos iteration, these nested commutators result in the cost of $\Theta_m v$ growing exponentially in m . The absence of nested commutators in our *commutator-free Magnus expansions* results in the cost of $\Theta_m v$ growing linearly in m .

Moreover, we are able to do this while keeping integrals intact, resulting in methods that are highly flexible – not only it is possible to approximate the integrals through any quadrature method, but we may also use exact integrals for potentials whenever possible. This proves particularly effective in the case of potentials with high temporal oscillations where we no longer require a severe depression of time steps.

As it has been noted in (Hochbruck & Lubich 2002), the (spectral) size of Magnus expansions turns out to be smaller than naive commutator bounds suggest. This is important since it has consequences for the number of Lanczos iterations required for sufficient accuracy, the size of time steps and overall accuracy. In the current paper this becomes directly evident in a constructive way when developing our commutator-free Magnus expansions.

1.3 Organisation of the paper

Section 2 is devoted to the derivation of commutator-free Magnus expansions. Magnus expansions for the Schrödinger equation evolve in the Lie algebra generated by ∂_x^2 and $V(\cdot)$. However, as it will be pointed out in Subsection 2.1, a straightforward simplification of commutators of these operators using the chain rule results in the loss of unitarity of the solution upon discretisation. One of the novelties of our approach is working in the algebra of anti-commutators, which leads to the preservation of skew-Hermitian structure and stability of the scheme. The procedure for deriving commutator-free Magnus expansions is presented in Subsections 2.2–2.6. In Subsections 2.7 and 2.8 we present concrete order four and order six Magnus expansions, Θ_2 and Θ_4 , respectively (methods (2.21) and (2.28)).

Section 3 deals with the implementation of our method. In Section 3.1 we provide some details concerning spatial discretisation. Section 3.2 deals with the evaluation of derivatives and integrals of the potential appearing in the Magnus expansion. While various alternatives are possible at this stage, a particular option – namely, finite differences for derivatives and Gauss–Legendre quadrature with three knots for integrals – is outlined in greater detail (expressions 3.3–3.8). In Section 3.3 we discuss the implementation of Lanczos iterations (achieved via (3.9)) for numerical exponentiation of the Magnus expansion and the number of Fast Fourier Transforms (FFTs) required per iteration.

Numerical examples are provided in Section 4, while in the last section we briefly summarise our results.

2 Commutator-free Magnus expansion

In contrast to the traditional approach of resorting to spatial discretisation of (1.1), which leads to the system of finite dimensional ODEs (1.2) followed by the Magnus expansion (1.4), we begin straight away with a Magnus expansion of (1.1) while keeping the underlying operators intact.

In numerically solving (1.1), consistently with standard practice we impose periodic boundary conditions on a finite interval $I \subseteq \mathbb{R}$. We further assume throughout that the interaction potential $V(\cdot, t)$ and the wavefunction $u(\cdot, t)$ are sufficiently smooth. For the purpose of this paper and for simplicity sake we assume that they belong to $C_p^\infty(I; \mathbb{R})$ and $C_p^\infty(I; \mathbb{C})$, respectively, the spaces of real valued and complex valued smooth periodic functions over I , but our results extend in a straightforward manner to functions of lower smoothness (the regularity constraints will depend on the desired order of the method being derived).

Considering (1.1) as an evolutionary PDE evolving in a Hilbert space, say $\mathcal{H} = L^2(I; \mathbb{C})$, and suppressing the dependence on x ,

$$\partial_t u(t) = (\mathrm{i}\partial_x^2 - \mathrm{i}V(t)) u(t), \quad u(0) = u_0 \in \mathcal{H}, \quad (2.1)$$

is seen to be of the ‘ODE-like’ form

$$\partial_t u(t) = A(t)u(t), \quad u(0) = u_0 \in \mathcal{H}, \quad (2.2)$$

with $A(t) = \mathrm{i}\partial_x^2 - \mathrm{i}V(t)$. The operator $A(t)$ belongs to $\mathfrak{u}(\mathcal{H})$, the Lie algebra of (infinite-dimensional) skew-Hermitian operators acting on the Hilbert space $\mathcal{H}$. Its flow is, therefore, unitary and resides in $\mathcal{U}(\mathcal{H})$ – the Lie group of unitary operators.

Unitary evolution of the wave function $u(t)$ under this flow is fundamental to quantum mechanics. Preservation of this property under discretisation is very important and we seek appropriate geometric numerical integrators to guarantee it. This comes about naturally once we work in the correct Lie-algebraic framework. As we note later, unitarity also guarantees stability of a consistent numerical scheme.

For a general equation of the form (2.2) where $A(t)$ resides in a Lie algebra $\mathfrak{g}$, the solution for the flow can be formally written in the form of a Magnus expansion,

$$u(h) = e^{\Theta(h)} u(0), \quad (2.3)$$

which differs from (1.4) in the sense that the Magnus expansion Θ is in general an infinite-dimensional and unbounded operator, not a matrix.

Remark 2 *Convergence of the Magnus expansion, in the finite dimensional case is only guaranteed for sufficiently small time steps (Moan & Niesen 2008). In principle, this becomes problematic when we consider Magnus expansions of undiscretised and unbounded operators.*

Rigorous analysis in the context of PDEs, such as the Schrödinger equation has been carried out by (Hochbruck & Lubich 2002) who show that when Magnus expansions of unbounded operators are considered in a formal sense, the concrete methods based on these approaches do demonstrate the expected order of convergence.

Pursuing a similar strategy, it is possible to derive rigorous error bounds for the Magnus expansion based methods presented in this manuscript. However, since this analysis involves development of additional theory that could obscure the presentation of the proposed methods, it will be beyond the scope of our investigations. Here we refer the curious reader to Chapter 9. of (Singh 2017).

2.1 The algebra of anti-commutators

The vector field in the Schrödinger equation (2.1) is a linear combination of the action of two operators, ∂_x^2 and the multiplication by the interaction potential $V(t)$, for any $t \geq 0$. Since the Magnus expansion requires nested commutation, the focus of our interest is the Lie algebra generated by ∂_x^2 and $V(\cdot)$,

$$\mathfrak{F} = \text{LA}\{\partial_x^2, V(\cdot)\},$$

i.e. the linear-space closure of all nested commutators of ∂_x^2 and $V(\cdot)$.

Simplifying commutators. To simplify commutators we could study their action on functions. For example, using the chain rule we find,

$$[\partial_x^2, V]u = \partial_x^2(Vu) - V(\partial_x^2 u) = (\partial_x^2 V)u + 2(\partial_x V)\partial_x u,$$

which implies that $[\partial_x^2, V] = (\partial_x^2 V) + 2(\partial_x V)\partial_x$. Similarly, we conclude that

$$\begin{aligned} [\partial_x^2, [\partial_x^2, V]] &= (\partial_x^4 V) + 4(\partial_x^3 V)\partial_x + 4(\partial_x^2 V)\partial_x^2, \\ [V, [\partial_x^2, V]] &= -2(\partial_x V)^2. \end{aligned}$$

Note that we have ignored here the dependence on the time variable since the derivatives are only in the spatial variable.

Loss of skew-Hermiticity. Simplifying commutators in this way, we can, in principle, get rid of all nested commutators occurring in the (truncated) Magnus expansion of the undiscretised operators. It is only after this stage that we would resort to spatial discretisation. Proceeding in this way, however, we break an important structural property – upon discretisation, such a commutator-free Magnus expansion is no longer skew-Hermitian and thus its exponential is no longer unitary.

To illustrate the loss of unitarity, let us consider the two differential operators: $[\partial_x^2, V]$ and $(\partial_x^2 V) + 2(\partial_x V)\partial_x$. Spatial discretisation transforms these two analytically identical operators to $[\mathcal{K}_2, \mathcal{D}_V]$ and $\mathcal{D}_{\partial_x^2 V} + 2\mathcal{D}_{\partial_x V}\mathcal{K}_1$, respectively. Assuming that $\mathcal{K}_n$ is skew-symmetric for odd n and symmetric for even n (i.e. the skew-symmetry of ∂_x is preserved under discretisation) and $\mathcal{D}_V$ is symmetric (note that V is real-valued and $\mathcal{D}_V$ represents multiplication by V), the commutator $[\mathcal{K}_2, \mathcal{D}_V]$ is skew-symmetric. However, the second expression, subject to discretisation, is no longer skew-symmetric. A similar problem is encountered in the discretisation of $[\partial_x^2, [\partial_x^2, V]]$ following the simplification of the commutator.

The loss of skew-symmetry in the simplification of $[\partial_x^2, V]$ (and skew-Hermiticity in general) is a cause for concern on two accounts: firstly, the exponential of a Magnus expansion which features terms like $[\partial_x^2, V]$ (Θ_2 , for instance) is no longer unitary, which is highly undesirable insofar as the physics is concerned; secondly, since $\mathcal{D}_{\partial_x^2 V} + 2\mathcal{D}_{\partial_x V}\mathcal{K}_1$ has (large) real eigenvalues, its exponential blows up, which is highly undesirable from the numerical point of view. This blowup can be extreme even in the simplest of cases (see Figure 2.1).

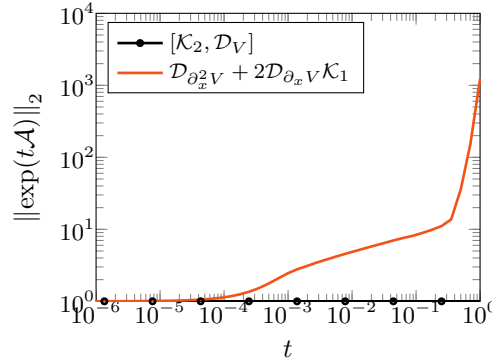


Figure 2.1: The two equivalent forms $[\partial_x^2, V]$ and $(\partial_x^2 V) + 2(\partial_x V)\partial_x$, lead to two different discretisations, $[\mathcal{K}_2, \mathcal{D}_V]$ and $\mathcal{D}_{\partial_x^2 V} + 2\mathcal{D}_{\partial_x V}\mathcal{K}_1$. While the exponential of the former is unitary, the exponential of the latter blows up.

The Lie algebra of anti-commutators. In the methods presented here we circumvent the problem by working with *anti-commutators*, that is the differential operators of the form

$$\langle f \rangle_k := \frac{1}{2} (f \circ \partial_x^k + \partial_x^k \circ f), \quad k \geq 0, \quad f \in C_p^\infty(I; \mathbb{R}), \quad (2.4)$$

which are inherently symmetrised. The action of this differential operator on u , for example, is

$$\langle f \rangle_k u = \frac{1}{2} (f \partial_x^k u + \partial_x^k (fu))$$

and the discretisation of this operator is

$$\langle f \rangle_k \rightsquigarrow \frac{1}{2} (\mathcal{D}_f \mathcal{K}_k + \mathcal{K}_k \mathcal{D}_f). \quad (2.5)$$

It is a very simple process to verify that the discretisation of $\langle f \rangle_k$ is skew-Hermitian for odd k and Hermitian for even k . This is the reason why the choice of algebra of anti-commutators $\langle \cdot \rangle_k$ seems to be optimal for our purposes.

Moreover, the commutators of these symmetrised differential operators can be

solved using the following rules,

$$\begin{aligned}
[\langle f \rangle_1, \langle g \rangle_0] &= \langle f(\partial_x g) \rangle_0, \\
[\langle f \rangle_1, \langle g \rangle_1] &= \langle f(\partial_x g) - (\partial_x f)g \rangle_1, \\
[\langle f \rangle_2, \langle g \rangle_0] &= 2 \langle f(\partial_x g) \rangle_1, \\
[\langle f \rangle_2, \langle g \rangle_1] &= \langle 2f(\partial_x g) - (\partial_x f)g \rangle_2 - \frac{1}{2} \langle 2(\partial_x f)(\partial_x^2 g) + f(\partial_x^3 g) \rangle_0, \\
[\langle f \rangle_2, \langle g \rangle_2] &= 2 \langle f(\partial_x g) - (\partial_x f)g \rangle_3 + \langle 2(\partial_x^2 f)(\partial_x g) - 2(\partial_x f)(\partial_x^2 g) + (\partial_x^3 f)g - f(\partial_x^3 g) \rangle_1, \\
[\langle f \rangle_3, \langle g \rangle_0] &= 3 \langle f(\partial_x g) \rangle_2 - \frac{1}{2} \langle 3(\partial_x f)(\partial_x^2 g) + f(\partial_x^3 g) \rangle_0, \\
[\langle f \rangle_4, \langle g \rangle_0] &= 4 \langle f(\partial_x g) \rangle_3 - 2 \langle 3(\partial_x f)(\partial_x^2 g) + f(\partial_x^3 g) \rangle_1.
\end{aligned} \tag{2.6}$$

There is rich algebraic theory underlying these anti-commutators (including a general formula for (2.6)) which feature in a separate publication (Singh 2015). In principle, however, the above rules can be verified by application of the chain rule.

Remark 3 *Note that, by definition (2.4),*

1. *these brackets are linear, so that $\langle 2f(\partial_x g) - (\partial_x f)g \rangle_2 = 2 \langle f(\partial_x g) \rangle_2 - \langle (\partial_x f)g \rangle_2$,*
2. *$\langle f \rangle_0 = f$; and*
3. *$\langle 1 \rangle_2 = \partial_x^2$.*

With this new notation in place and using (2.6), we can now simplify commutators to anti-commutators,

$$\begin{aligned}
[i\partial_x^2, iV] &= -[\langle 1 \rangle_2, \langle V \rangle_0] = -2 \langle \partial_x V \rangle_1, \\
[iV, [i\partial_x^2, iV]] &= -i[\langle V \rangle_0, [\langle 1 \rangle_2, \langle V \rangle_0]] = 2i \langle (\partial_x V)^2 \rangle_0, \\
[i\partial_x^2, [i\partial_x^2, iV]] &= -i[\langle 1 \rangle_2, [\langle 1 \rangle_2, \langle V \rangle_0]] = i \langle \partial_x^4 V \rangle_0 - 4i \langle \partial_x^2 V \rangle_2.
\end{aligned}$$

Straightforward discretisations of these operators preserve the symmetries that are crucial for preserving unitarity.

2.2 The expansion for the Schrödinger equation

Using the approach introduced in the previous section, commutators in the Magnus expansion, $\Theta(h) = \sum_{k=1}^{\infty} \Theta^{[k]}(h)$, can be expanded in terms of anti-commutators: $\Theta(h) = \sum_{k=0}^{\infty} i^{k+1} \langle f_k \rangle_k$. Since $A(t) = i\partial_x^2 - iV(t) = i \langle 1 \rangle_2 - i \langle V(t) \rangle_0$, the first term of the Magnus expansion is the integral $\Theta^{[1]}(h) = \int_0^h A(h) d\zeta$,

$$\Theta^{[1]}(h) = ih \langle 1 \rangle_2 - i \int_0^h \langle V(\zeta) \rangle_0 d\zeta = ih \langle 1 \rangle_2 - i \left\langle \int_0^h V(\zeta) d\zeta \right\rangle_0. \tag{2.7}$$

Note that the integrals here are in time, while differential operators are in space. Along with linearity of the brackets and integrals, this observation allows us to exchange brackets and integrals.

The first non-trivial term. $\Theta^{[2]}(h)$, is simplified as

$$\begin{aligned}
\Theta^{[2]}(h) &= -\frac{1}{2} \int_0^h \int_0^\zeta [A(\xi), A(\zeta)] \, d\xi \, d\zeta \\
&= -\frac{1}{2} \int_0^h \int_0^\zeta [\mathbf{i} \langle 1 \rangle_2 - \mathbf{i} \langle V(\xi) \rangle_0, \mathbf{i} \langle 1 \rangle_2 - \mathbf{i} \langle V(\zeta) \rangle_0] \, d\xi \, d\zeta \\
&= -\frac{1}{2} \int_0^h \int_0^\zeta [\langle 1 \rangle_2, \langle V(\zeta) \rangle_0] + [\langle V(\xi) \rangle_0, \langle 1 \rangle_2] \, d\xi \, d\zeta \\
&= -\left(\int_0^h \zeta \langle \partial_x V(\zeta) \rangle_1 \, d\zeta - \int_0^h \int_0^\zeta \langle \partial_x V(\xi) \rangle_1 \, d\xi \, d\zeta \right) \\
&= -\left\langle \int_0^h \zeta (\partial_x V(\zeta)) \, d\zeta - \int_0^h \int_0^\zeta (\partial_x V(\xi)) \, d\xi \, d\zeta \right\rangle_1. \tag{2.8}
\end{aligned}$$

Higher order terms. Similarly, using (2.6), we can simplify higher nested commutators in the Magnus expansion. For instance,

$$\Theta^{[3,1]}(h) = \frac{1}{12} \int_0^h \left[\int_0^{\xi_1} A(\xi_2) d\xi_2, \left[\int_0^{\xi_1} A(\xi_2) d\xi_2, A(\xi_1) \right] \right] d\xi_1,$$

which occurs as a part of $\Theta^{[3]}(h)$, is simplified to

$$\begin{aligned}
\Theta^{[3,1]}(h) &= \frac{1}{3} \mathbf{i} \left\langle \int_0^h \zeta^2 (\partial_x^2 V(\zeta)) \, d\zeta - \int_0^h \zeta \int_0^\zeta (\partial_x^2 V(\xi)) \, d\xi \, d\zeta \right\rangle_2 \\
&\quad + \frac{1}{6} \mathbf{i} \left\langle \int_0^h \zeta (\partial_x V(\zeta)) \int_0^\zeta (\partial_x V(\xi)) \, d\xi \, d\zeta - \int_0^h \left(\int_0^\zeta (\partial_x V(\xi)) \, d\xi \right)^2 \, d\zeta \right\rangle_0 \\
&\quad - \frac{1}{12} \mathbf{i} \left\langle \int_0^h \zeta^2 (\partial_x^4 V(\zeta)) \, d\zeta - \int_0^h \zeta \int_0^\zeta (\partial_x^4 V(\xi)) \, d\xi \, d\zeta \right\rangle_0. \tag{2.9}
\end{aligned}$$

2.3 Simplification of integrals

After simplifying terms in the Magnus expansion we arrive at expressions such as (2.8) and (2.9), where each integral is of the form

$$I_{\mathcal{S},f}(h) = \int_{\mathcal{S}} f(\boldsymbol{\xi}) \, d\boldsymbol{\xi},$$

where $\mathbf{f}(\boldsymbol{\xi}) = \prod_{j=1}^s f_j(\xi_j)$ for some function f_j , and $\mathcal{S}$ is an s -dimensional polytope of the special form,

$$\mathcal{S} = \{\boldsymbol{\xi} \in \mathbb{R}^s : \xi_1 \in [0, h], \quad \xi_l \in [0, \xi_{m_l}], \quad l = 2, 3, \dots, s\}, \tag{2.10}$$

where $m_l \in \{1, 2, \dots, l-1\}$, $l = 2, 3, \dots, s$. For details about the types of polytopes of integration appearing in the Magnus expansion see (Iserles et al. 2000).

The special form of these polytopes and the integrands obtained after expanding the commutators, allows us to simplify the terms of the Magnus expansion further. Integration by parts leads us to the following identities:

$$\int_0^h f_1(\xi_1) \left(\int_0^{\xi_1} f_2(\xi_2) d\xi_2 \right) d\xi_1 = \int_0^h f_2(\xi_1) \left(\int_{\xi_1}^h f_1(\xi_2) d\xi_2 \right) d\xi_1, \quad (2.11)$$

$$\begin{aligned} & \int_0^h f_1(\xi_1) d\xi_1 \left(\int_0^{\xi_1} f_2(\xi_2) d\xi_2 \right) \left(\int_0^{\xi_1} f_3(\xi_3) d\xi_3 \right) d\xi_1 \\ &= \int_0^h \left(\int_{\xi_3}^h f_1(\xi_1) d\xi_1 \right) \left(f_2(\xi_3) \int_0^{\xi_3} f_3(\xi_2) d\xi_2 + f_3(\xi_3) \int_0^{\xi_3} f_2(\xi_2) d\xi_2 \right) d\xi_3. \end{aligned} \quad (2.12)$$

In our simplifications, (2.8) and (2.9), we have already encountered integrals over a triangle such as $\int_0^h \int_0^\zeta (\partial_x V(\xi)) d\xi d\zeta$ and $\int_0^h \zeta \int_0^\zeta (\partial_x^2 V(\xi)) d\xi d\zeta$. We can reduce these to integrations over a line by applying the first identity with $f_1(\xi_1) = 1$, $f_2(\xi_2) = \partial_x V(\xi_2)$ and $f_1(\xi_1) = \xi_1$, $f_2(\xi_2) = \partial_x V(\xi_2)$, respectively. Integration over the pyramid in $\int_0^h \left(\int_0^\zeta (\partial_x V(\xi)) d\xi \right)^2 d\zeta$ is similarly reduced using the second identity with $f_1(\xi_1) = 1$, $f_2(\xi_2) = \partial_x V(\xi_2)$, $f_3(\xi_3) = \partial_x V(\xi_3)$.

Remark 4 *The use of identities (2.11) and (2.12) is what allows us to reduce the complexity of the integrals in our commutator-free Magnus expansions. In particular, our order-six method in Subsection 2.8 features integrals over a triangle instead of integrals over four-dimensional polytopes that are typical in the usual order-six Magnus expansions.*

Remark 5 *Although it might be possible to develop general formalism for extending these observations to higher dimensional polytopes appearing in the Magnus expansion, the two identities presented here suffice for all results presented in our work. Deducing similarly useful identities for reduction of nested integrals in any specific high dimensional polytope should also be possible and would be a very helpful result.*

2.4 A proposed commutator-free Magnus expansion

After simplification of commutators and applications of the integration identities (2.11) and (2.12), the Magnus expansion Θ_3 , for instance, reduces to the sum of the following terms,

$$\Theta^{[1]}(h) = ih\partial_x^2 - i \int_0^h V(\zeta) d\zeta, \quad (2.13)$$

$$\Theta^{[2]}(h) = -2 \left\langle \int_0^h \left(\zeta - \frac{h}{2} \right) (\partial_x V(\zeta)) d\zeta \right\rangle_1, \quad (2.14)$$

$$\begin{aligned} \Theta^{[3,1]}(h) = & -\frac{1}{6}i \int_0^h \int_0^\zeta (2h - 3\zeta) (\partial_x V(\zeta)) (\partial_x V(\xi)) d\xi d\zeta \\ & - \frac{1}{6}i \left\langle \int_0^h (h^2 - 3\zeta^2) (\partial_x^2 V(\zeta)) d\zeta \right\rangle_2, \end{aligned} \quad (2.15)$$

$$\begin{aligned} \Theta^{[3,2]}(h) = & \frac{1}{2}i \int_0^h \int_0^\zeta (\zeta - 2\xi) (\partial_x V(\zeta)) (\partial_x V(\xi)) d\xi d\zeta \\ & + \frac{1}{2}i \left\langle \int_0^h (h^2 - 4h\zeta + 3\zeta^2) (\partial_x^2 V(\zeta)) d\zeta \right\rangle_2, \end{aligned} \quad (2.16)$$

where $\Theta^{[3,2]}(h)$ refers to the second part of $\Theta^{[3]}$. Here and in the sequel we prefer to express $\langle f \rangle_1$ as f and $\langle 1 \rangle_2$ as ∂_x^2 to avoid an excessively pedantic and longwinded notation.

Remark 6 The term $\Theta^{[2]}(h) = -2 \left\langle \int_0^h (\zeta - \frac{h}{2}) (\partial_x V(\zeta)) d\zeta \right\rangle_1$ might seem to be $\mathcal{O}(h^2)$ at first sight. A closer look at the special form of the integrand, however, shows that the term is, in fact, $\mathcal{O}(h^3)$. To observe this, consider $V(\zeta)$ expanded about 0, so that $V(\zeta) = V(0) + \sum_{k=1}^\infty \zeta^k V^{(k)}(0)/k!$. Note that the h^2 term $\int_0^h (\zeta - \frac{h}{2}) (\partial_x V(0)) d\zeta$ vanishes. Similar care has to be exercised throughout the simplifications while analysing size. We refer the reader to (Iserles et al. 2000) for a more general analysis of such gains of powers of h , which occurs in specific terms of the Magnus expansion due to their structure.

2.5 Time symmetry and even-indexed methods

The Magnus expansions we use here are the *power truncated* Magnus expansions of (Iserles et al. 2000). Their accuracy, by design, is,

$$\Theta_p(h) = \Theta(h) + \mathcal{O}(h^{p+2}), \quad p = 2q, \quad q \in \mathbb{Z} \quad (2.17)$$

These expansions are odd in h due to time symmetry of the flow (Iserles & Nørsett 1999, Iserles et al. 2000, Iserles et al. 2001). Even-indexed methods of this form consequently gain an extra power of h ,

$$\Theta_p(h) = \Theta(h) + \mathcal{O}(h^{p+3}), \quad p = 2q, \quad q \in \mathbb{Z}. \quad (2.18)$$

Thus, $\Theta_2(h) = \Theta(h) + \mathcal{O}(h^5)$ and $\Theta_3(h) = \Theta(h) + \mathcal{O}(h^5)$ are both fourth order commutator-free Magnus expansions. Ideally, we should only use even indexed versions since we gain extra accuracy without additional cost.

2.6 A simplifying notation

The algebraic workings become increasingly convoluted once we start dealing with larger nested commutators and integrals. Here it becomes helpful to introduce a

notation for the integrals on the line,

$$\mu_{j,k}(h) = \int_0^h \tilde{B}_j^k(h, \zeta) V(\zeta) d\zeta, \quad (2.19)$$

and integrals over a triangle,

$$\Lambda[f]_{a,b}(h) = \int_0^h \int_0^\zeta f(h, \zeta, \xi) [\partial_x^a V(\zeta)] [\partial_x^b V(\xi)] d\xi d\zeta, \quad (2.20)$$

where $\tilde{B}$ is a rescaling of Bernoulli polynomials (Abramowitz & Stegun 1964, Lehmer 1988),

$$\tilde{B}_j(h, \zeta) = h^j B_j(\zeta/h).$$

2.7 Fourth order commutator-free Magnus expansions

With this new notation in place, the Magnus expansions $\Theta_2(h)$ and $\Theta_3(h)$ can be presented more concisely,

$$\Theta_2(h) = \overbrace{ih\varepsilon\partial_x^2 - i\varepsilon^{-1}\mu_{0,0}(h)}^{\mathcal{O}(h)} - 2\overbrace{\langle\partial_x\mu_{1,1}(h)\rangle_1}^{\mathcal{O}(h^3)}, \quad (2.21)$$

$$\Theta_3(h) = \Theta_2(h) + \overbrace{i\varepsilon^{-1}\Lambda[\psi]_{1,1}(h) + 2i\varepsilon\langle\partial_x^2\mu_{2,1}(h)\rangle_2}^{\mathcal{O}(h^4)}, \quad (2.22)$$

where

$$\psi(h, \zeta, \xi) = \zeta - \xi - \frac{h}{3}.$$

As noted in Section 2.5, both of these are fourth-order expansions.

Remark 7 *Since the j th rescaled Bernoulli polynomial scales as $\mathcal{O}(h^j)$, we expect $\mu_{j,k}(h) = \mathcal{O}(h^{jk+1})$. Since the integral of the Bernoulli polynomials vanishes,*

$$\int_0^h B_j(h, \zeta) d\zeta = 0, \quad (2.23)$$

however, the term $\mu_{j,1}(h)$ gains an extra power of h and is $\mathcal{O}(h^{j+2})$.

In general, for a polynomial $p_n(h, \zeta, \xi)$ featuring only degree- n terms in h, ζ and ξ , the linear (integral) functional (2.20) is $\mathcal{O}(h^{n+2})$. However, the integral of ψ over the triangle vanishes,

$$\int_0^h \int_0^\zeta \psi(h, \zeta, \xi) d\xi d\zeta = 0, \quad (2.24)$$

lending an extra power of h to terms featuring $\Lambda[\psi]_{a,b}(h)$.

2.8 Sixth order commutator-free Magnus expansions

Arbitrarily high order commutator-free Magnus expansions can be derived by following the procedure described in the preceding sections. The order six commutator-free Magnus expansion, $\Theta_4(h)$, for instance, is

$$\begin{aligned} \Theta_4(h) = & \overbrace{ih\partial_x^2 - i\mu_{0,0}(h)}^{\mathcal{O}(h)} - 2\overbrace{\langle\partial_x\mu_{1,1}(h)\rangle_1}^{\mathcal{O}(h^3)} + \overbrace{i\Lambda[\psi]_{1,1}(h) + 2i\langle\partial_x^2\mu_{2,1}(h)\rangle_2}^{\mathcal{O}(h^4)} \\ & + \overbrace{\frac{1}{6}\langle\Lambda[\varphi_1]_{1,2}(h) + \Lambda[\varphi_2]_{2,1}(h)\rangle_1}^{\mathcal{O}(h^4)} + \overbrace{\frac{1}{6}\langle\Lambda[\phi_1]_{1,2}(h) + \Lambda[\phi_2]_{2,1}(h)\rangle_1}^{\mathcal{O}(h^5)} \\ & + \overbrace{\frac{4}{3}\langle\partial_x^3\mu_{3,1}(h)\rangle_3}^{\mathcal{O}(h^5)} + \overbrace{\frac{1}{4}i\partial_x^4\mu_{2,1}(h)}^{\mathcal{O}(h^4)} = \Theta(h) + \mathcal{O}(h^7), \end{aligned} \quad (2.25)$$

where

$$\begin{aligned} \varphi_1(h, \zeta, \xi) &= h^2 - 4h\xi + 2\zeta\xi, \\ \varphi_2(h, \zeta, \xi) &= (h - 2\zeta)^2 - 2\zeta\xi, \\ \phi_1(h, \zeta, \xi) &= h^2 - 6h\zeta + 6h\xi + 6\zeta\xi + 3\zeta^2 - 12\xi^2, \\ \phi_2(h, \zeta, \xi) &= h^2 - 6h\zeta + 6h\xi - 6\zeta\xi + 5\zeta^2. \end{aligned} \quad (2.26)$$

Remark 8 Integrals of ϕ_j vanish over the triangle,

$$\int_0^h \int_0^\zeta \phi_j(h, \zeta, \xi) d\xi d\zeta = 0, \quad j = 1, 2, \quad (2.27)$$

lending an extra power of h to the functionals wherever ϕ_j s appear. No similar observation about φ_j s can be made and they have been kept separate in (2.25) from the Λ terms featuring ϕ_j simply since they lead to terms of different orders. For purposes of computing, however, they can be combined.

The linearity of the brackets means that $\Theta_4(h)$ can be rewritten in the form,

$$\Theta_4(h) = \theta_0 + \langle\theta_1\rangle_1 + \langle\theta_2\rangle_2 + \langle\theta_3\rangle_3 \quad (2.28)$$

where

$$\begin{aligned} \theta_0 &= -i\mu_{0,0}(h) + i\Lambda[\psi]_{1,1}(h) + \frac{1}{4}i\partial_x^4\mu_{2,1}(h), \\ \theta_1 &= -2\partial_x\mu_{1,1}(h) + \frac{1}{6}\Lambda[\varphi_1 + \phi_1]_{1,2}(h) + \frac{1}{6}\Lambda[\varphi_2 + \phi_2]_{2,1}(h), \\ \theta_2 &= ih + 2i\partial_x^2\mu_{2,1}(h), \\ \theta_3 &= \frac{4}{3}\partial_x^3\mu_{3,1}(h). \end{aligned} \quad (2.29)$$

Written in this form, it is clearly evident that Θ_4 is free of nested commutators and is composed of a very small number of anti-commutators. In fact, the number of anti-commutators grows linearly with the order of accuracy. As we see in the following section, this makes a significant difference to the cost of our methods when compared to standard Magnus–Lanczos schemes (which feature nested commutators and consequently a cost that grows exponentially with order).

Remark 9 *Note that, for potentials of the form $V(x, t) = V_0(x) + f(t)x$, the terms involving $\mu_{1,1}(h)$, $\mu_{2,1}(h)$ and $\mu_{3,1}(h)$ all vanish.*

3 Commutator-free Magnus–Lanczos methods

In the previous section we proposed the commutator-free Magnus expansion. The next step consists in numerically approximating the exponential of this expansion (1.5), which is a challenging problem itself. We will show how Lanczos iterations can be much cheaper when combined with the commutator-free versions of the Magnus expansion. In this section we present some details of implementation and highlight some crucial features of our schemes.

3.1 Spatial discretisation.

In principle, our methods can be combined with any spatial discretisation strategy, provided the discretisation of ∂_x^n is symmetric for even n and skew-symmetric for odd n . Here we resort to spectral collocation due to its high accuracy. Having imposed periodic boundaries on I , we use equispaced grids with N points. Since we work with values at the grid points, multiplication by the function V (or, in general, function f) is discretised as an $N \times N$ diagonal matrix $\mathcal{D}_V$ (or $\mathcal{D}_f$) with values of V (or f) at the grid points along the diagonal. The differentiation matrices $\mathcal{K}_k$ are symmetric for even k and skew-symmetric for odd k , just as we have assumed throughout. Additionally, spectral collocation results in $\mathcal{K}_k$ being an $N \times N$ circulant. Consequently, it is diagonalisable via Fourier transform,

$$\mathcal{K}_k = \mathcal{F}^{-1} \mathcal{D}_{c_k} \mathcal{F},$$

where c_k is the symbol of $\mathcal{K}_k$ and $\mathcal{F}$ is the $N \times N$ Fourier transform matrix.

Since $\|\mathcal{D}_f\|_2 \leq \|f\|_\infty$, the matrix $\mathcal{D}_f$ does not scale with N . On the other hand, it can be verified that $\mathcal{K}_k$ scales as N^k . As previously noted in (2.5), the operator $\langle f \rangle_k$ is discretised as $\frac{1}{2}(\mathcal{D}_f \mathcal{K}_k + \mathcal{K}_k \mathcal{D}_f)$. Consequently, upon discretisation, $\langle f \rangle_k$ also scales as N^k . We write $\mathcal{K}_k = \mathcal{O}(N^k)$ and, abusing notation somewhat, $\langle f \rangle_k = \mathcal{O}(N^k)$.

The order-four Magnus expansion $\Theta_2(h)$, with a local error $\mathcal{O}(h^5)$, discretises to the form

$$\Theta_2(h) \rightsquigarrow -i\varepsilon^{-1} \mathcal{D}_{\mu_{0,0}(h)} - (\mathcal{D}_{\partial_x \mu_{1,1}(h)} \mathcal{K}_1 + \mathcal{K}_1 \mathcal{D}_{\partial_x \mu_{1,1}(h)}) + i h \varepsilon \mathcal{K}_2, \quad (3.1)$$

while the discretisation of the order-six Magnus expansion $\Theta_4(h)$ with local error $\mathcal{O}(h^7)$ is

$$\Theta_4(h) \rightsquigarrow \mathcal{D}_{\theta_0} + \frac{1}{2}(\mathcal{D}_{\theta_1} \mathcal{K}_1 + \mathcal{K}_1 \mathcal{D}_{\theta_1}) + \frac{1}{2}(\mathcal{D}_{\theta_2} \mathcal{K}_2 + \mathcal{K}_2 \mathcal{D}_{\theta_2}) + \frac{1}{2}(\mathcal{D}_{\theta_3} \mathcal{K}_3 + \mathcal{K}_3 \mathcal{D}_{\theta_3}). \quad (3.2)$$

3.2 Evaluation of integrals and derivatives of the potential.

Before we use (3.1) or (3.2) in a practical algorithm, however, we are still left with the task of approximating functions such as $\mu_{0,0}(h)$, $\partial_x \mu_{1,1}(h)$, $\Lambda[\psi]_{1,1}(h)$ and $\Lambda[\varphi_1 + \phi_1]_{1,2}(h)$ at the grid points, which are hidden in θ_i in the case of Θ_4 . These feature both integrals and derivatives of the potential. In some cases, it might be possible to evaluate some or all of these analytically. In other cases, however, these can be approximated by a combination of quadrature methods and finite difference differentiation².

We note that since the derivatives and the integrals are in space and time, respectively, they can be exchanged. Thus the optimal strategy might involve evaluating derivatives first in some cases and integrals first in others. The optimal strategy could also depend on the relative resolutions of temporal and spatial grids. A more challenging scenario is when the temporal grid is coarser than the spatial grid, $h = (\Delta x)^\sigma$ for some $0 < \sigma \leq 1$ (in other words, we consider larger time steps). For the sake of simplicity, we follow a fixed strategy of evaluating the derivatives of the potential first.

Derivatives. The various derivatives of V that we need to approximate here, $\partial_x V$, $\partial_x^2 V$, $\partial_x^3 V$ and $\partial_x^4 V$, require differentiation to different degrees of accuracy. Consider $\partial_x \mu_{1,1}(h)$. Due to (2.23), $\int_0^h \tilde{B}_1(h, \zeta) f(\zeta) d\zeta$ is $\mathcal{O}(h^3)$ for any f . Let $\mathcal{K}_k^{\text{FD},n}$ be the finite difference differentiation matrix approximating ∂_x^k up to an error of $(\Delta x)^n$. Assuming $h = \Delta x$, if we approximate $\partial_x V$ to an accuracy of $\mathcal{O}((\Delta x)^4) = \mathcal{O}(h^4)$ via $\mathcal{K}_1^{\text{FD},4} \mathbf{V}$, the integral $\int_0^h \tilde{B}_1(h, \zeta) \mathcal{K}_1^{\text{FD},4} \mathbf{V}(\zeta) d\zeta$ approximates $\partial_x \mu_{1,1}(h)$ to the required accuracy of $\mathcal{O}(h^7)$. When we consider a coarser temporal grid with $h = \sqrt{\Delta x}$, say, the lower accuracy (and lower cost) differentiation matrix $\mathcal{K}_1^{\text{FD},2}$ suffices.

Similar considerations show that we need to approximate $\partial_x^2 V$ to an accuracy of $\mathcal{O}(h^3)$, $\partial_x^3 V$ to an accuracy of $\mathcal{O}(h^2)$ and $\partial_x^4 V$ to an accuracy of $\mathcal{O}(h^3)$.

Quadrature. For the purpose of approximating the integrals, we can resort to a variety of quadrature methods, among which Gauss–Legendre quadratures are the most popular due to their high orders of accuracy. For instance, all these integrals can be approximated to $\mathcal{O}(h^7)$ accuracy using Gauss–Legendre quadrature at the knots $\tau_k = h(1 + k\sqrt{3/5})/2$, $k = -1, 0, 1$, with the weights $w_k = \frac{5}{18}h, \frac{4}{9}h, \frac{5}{18}h$ (Davis & Rabinowitz 1984).³

Approximation of line integrals. Under $\sigma = 1$, the line integrals $\mu_{j,k}(h)$ and their derivatives appearing in Θ_4 can be approximated to $\mathcal{O}(h^7)$ accuracy by using

²Here we suggest finite differences instead of spectral collocation since the potential is usually less oscillatory and more easily resolved than the wave function. Moreover, as we see shortly, lower degrees of accuracy are required in some cases, allowing us to reduce costs.

³Recall that since these Magnus expansions are odd in h , the $\mathcal{O}(h^6)$ Gauss–Legendre quadrature automatically becomes $\mathcal{O}(h^7)$ in this context.

the weights w_k ,

$$\mu_{0,0}(h) \rightsquigarrow w_{-1}\mathbf{V}(\tau_{-1}) + w_0\mathbf{V}(\tau_0) + w_1\mathbf{V}(\tau_1), \quad (3.3)$$

$$\partial_x \mu_{1,1}(h) \rightsquigarrow w_{-1}\tilde{B}_1(h, \tau_{-1})\mathcal{K}_1^{\text{FD},4}\mathbf{V}(\tau_{-1}) + w_1\tilde{B}_1(h, \tau_1)\mathcal{K}_1^{\text{FD},4}\mathbf{V}(\tau_1), \quad (3.4)$$

$$\begin{aligned} \partial_x^2 \mu_{2,1}(h) \rightsquigarrow & w_{-1}\tilde{B}_2(h, \tau_{-1})\mathcal{K}_2^{\text{FD},3}\mathbf{V}(\tau_{-1}) \\ & + w_0\tilde{B}_2(h, \tau_0)\mathcal{K}_2^{\text{FD},3}\mathbf{V}(\tau_0) + w_1\tilde{B}_2(h, \tau_1)\mathcal{K}_2^{\text{FD},3}\mathbf{V}(\tau_1), \end{aligned} \quad (3.5)$$

$$\begin{aligned} \partial_x^3 \mu_{1,3}(h) \rightsquigarrow & w_{-1}\tilde{B}_1(h, \tau_{-1})^3\mathcal{K}_3^{\text{FD},2}\mathbf{V}(\tau_{-1}) \\ & + w_0\tilde{B}_1(h, \tau_0)^3\mathcal{K}_3^{\text{FD},2}\mathbf{V}(\tau_0) + w_1\tilde{B}_1(h, \tau_1)^3\mathcal{K}_3^{\text{FD},2}\mathbf{V}(\tau_1), \end{aligned} \quad (3.6)$$

$$\begin{aligned} \partial_x^4 \mu_{2,1}(h) \rightsquigarrow & w_{-1}\tilde{B}_2(h, \tau_{-1})\mathcal{K}_4^{\text{FD},3}\mathbf{V}(\tau_{-1}) \\ & + w_0\tilde{B}_2(h, \tau_0)\mathcal{K}_4^{\text{FD},3}\mathbf{V}(\tau_0) + w_1\tilde{B}_2(h, \tau_1)\mathcal{K}_4^{\text{FD},3}\mathbf{V}(\tau_1), \end{aligned} \quad (3.7)$$

where we note that since $\tilde{B}_1(h, \tau_0) = 0$, the τ_0 term does not appear in (3.4). We note that, instead of (3.5) and (3.7), approximating $\mu_{2,1}(h)$ first and then evaluating its derivatives would be cheaper overall. However, as mentioned earlier, we attempt here to provide a simple and clear procedure, not a fully optimised one.

For the order four Magnus expansion, Θ_2 , the first two terms (3.3) and (3.4) suffice. However, since we need only $\mathcal{O}(h^5)$ accuracy, we could do with just two Gauss–Legendre knots.

Approximation of integrals over the triangle. For the integrals over the triangle such as $\Lambda[\psi]_{1,1}(h)$, the appropriate weights can be found by substituting the interpolant, $\tilde{\mathbf{v}}(t) = \sum_{k=-1}^1 \ell_k(t)\mathbf{v}(\tau_k)$, where $\mathbf{v}$ is usually a derivative of the potential⁴ and where $\ell_k(t)$ are the Lagrange cardinal functions, $\ell_k(\tau_j) = \delta_{j,k}$. Thus we discretise,

$$\begin{aligned} \Lambda[f]_{a,b}(h) & \rightsquigarrow \int_0^h \int_0^\zeta \sum_{j=-1}^1 \sum_{k=-1}^1 f(h, \zeta, \xi) \ell_j(\zeta) \ell_k(\xi) [\mathcal{K}_a^{\text{FD},r}\mathbf{V}(\tau_j)] [\mathcal{K}_b^{\text{FD},r}\mathbf{V}(\tau_k)] \, d\xi \, d\zeta \\ & = \sum_{j=-1}^1 \sum_{k=-1}^1 w_{jk}^f [\mathcal{K}_a^{\text{FD},r}\mathbf{V}(\tau_j)] [\mathcal{K}_b^{\text{FD},r}\mathbf{V}(\tau_k)], \end{aligned} \quad (3.8)$$

where we need to approximate derivatives of V to order r (under the scaling $\sigma = 1$, $r = 3$ suffices for all Λ terms in Θ_4 for $\mathcal{O}(h^7)$ accuracy), and where w_{jk}^f are the weights specific to f ,

$$w_{jk}^f = \int_0^h \int_0^\zeta f(h, \zeta, \xi) \ell_j(\zeta) \ell_k(\xi) \, d\xi \, d\zeta.$$

The weights for the functions $\psi, \varphi_1, \varphi_2, \phi_1$ and ϕ_2 that are required for the implementation of an order-six method have been provided in Appendix A. The method for discretising the anti-commutators, as well as a particular recipe for approximating the integrals and derivatives of the potential, is in place.

Remark 10 *Having elaborated on the use of Gauss–Legendre quadratures in developing a specific scheme, we remind the reader that a major advantage of preserving integrals throughout the workings in Section 2 is the flexibility of allowing alternative means for evaluating integrals and derivatives, including the possibility of exact integration and derivation.*

⁴For instance, $\mathbf{v}(t) = \mathcal{K}_1^{\text{FD},3}\mathbf{V}(t)$ suffices in the approximation of $\Lambda[\psi]_{1,1}(h)$.

3.3 Approximation of the exponential of a Magnus expansion.

After discretising $\Theta_2(h)$ and $\Theta_4(h)$, we are left with the task of approximating their exponential in (2.3) in order to find the solution

$$\mathbf{u}^1 = \exp(\Theta_m(h))\mathbf{u}^0.$$

As discussed in Section 1.1, Lanczos iterations are a very effective, and perhaps the most popular, means for approximating the exponential of a Magnus expansion. This will be the approach adopted in this paper.

Approximation of the matrix vector product $\exp(\Theta_p)\mathbf{u}$ via Lanczos iterations requires the evaluation of $\Theta_p\mathbf{v}$ in each Lanczos iteration. So long as the number of steps is reasonably small, the cost is dominated by the cost of evaluating $\Theta_p\mathbf{v}$.

Standard Magnus expansions feature nested commutators. In the method presented in Section 1.1, Θ_p features commutators nested to $p - 1$ levels. For a commutator C_p that is nested to p levels, the cost of evaluating the matrix-vector product $C_p\mathbf{v}$ grows exponentially with p . Consequently, the cost of $\Theta_p\mathbf{v}$ in standard Magnus–Lanczos schemes grows exponentially with the order of the scheme. In contrast our commutator-free Magnus expansions feature a linearly growing number of non-nested terms. As evident from (3.2), for instance our $\mathcal{O}(h^7)$ method $\Theta_4(h)$ is comprised of a small number of terms. The approximation of $\Theta_4\mathbf{v}$ in each Lanczos iterations requires us to compute

$$\begin{aligned} \Theta_4(h)\mathbf{v} &= \mathcal{D}_{\theta_0}\mathbf{v} + \frac{1}{2}(\mathcal{D}_{\theta_1}\mathcal{K}_1 + \mathcal{K}_1\mathcal{D}_{\theta_1})\mathbf{v} + \frac{1}{2}(\mathcal{D}_{\theta_2}\mathcal{K}_2 + \mathcal{K}_2\mathcal{D}_{\theta_2})\mathbf{v} + \frac{1}{2}(\mathcal{D}_{\theta_3}\mathcal{K}_3 + \mathcal{K}_3\mathcal{D}_{\theta_3})\mathbf{v} \\ &= \mathcal{D}_{\theta_0}\mathbf{v} + \frac{1}{2}(\mathcal{D}_{\theta_1}\mathcal{F}^{-1}\mathcal{D}_{c_1}\mathcal{F} + \mathcal{F}^{-1}\mathcal{D}_{c_1}\mathcal{F}\mathcal{D}_{\theta_1})\mathbf{v} \\ &\quad + \frac{1}{2}(\mathcal{D}_{\theta_2}\mathcal{F}^{-1}\mathcal{D}_{c_2}\mathcal{F} + \mathcal{F}^{-1}\mathcal{D}_{c_2}\mathcal{F}\mathcal{D}_{\theta_2})\mathbf{v} + \frac{1}{2}(\mathcal{D}_{\theta_3}\mathcal{F}^{-1}\mathcal{D}_{c_3}\mathcal{F} + \mathcal{F}^{-1}\mathcal{D}_{c_3}\mathcal{F}\mathcal{D}_{\theta_3})\mathbf{v} \\ &= \mathcal{D}_{\theta_0}\mathbf{v} + \frac{1}{2}\left(\sum_{j=1}^3\mathcal{D}_{\theta_j}\mathcal{F}^{-1}\mathcal{D}_{c_j}\right)\mathcal{F}\mathbf{v} + \frac{1}{2}\mathcal{F}^{-1}\left(\sum_{j=1}^3\mathcal{D}_{c_j}\mathcal{F}\mathcal{D}_{\theta_j}\mathbf{v}\right), \end{aligned} \quad (3.9)$$

which requires merely eight FFTs.

3.4 Features

Unitarity, norm preservation and stability. Note that our Magnus expansions (2.21) and (2.28) are of the form $\sum_{k=0}^{\infty} i^{k+1} \langle \theta_k \rangle_k$ for some θ_k , and it can be seen that each term $i^{k+1} \langle \theta_k \rangle_k$ discretises to a skew-Hermitian form in (3.1) and (3.2), respectively. The Magnus expansion, developed in this way preserves skew-Hermiticity and its exponential therefore preserves unitarity. As mentioned in Section 1.1, this is consistent with a central feature of quantum mechanics. Additionally, since the exponential is unitary,

$$\|\mathbf{u}^1\|_2 = \|\exp(\Theta_m(h))\mathbf{u}^0\|_2 = \|\mathbf{u}^0\|_2,$$

and the norm of $\mathbf{u}$ is preserved. Consequently, unitarity guarantees stability of our schemes under any scaling of h and Δx .

Height reduction. A very interesting feature of the symmetrised differential operators (2.4) is the property of *height reduction*. We define the height of a symmetrised differential operator as the highest index,

$$\text{ht} \left(\sum_{j=0}^n \langle f_j \rangle_j \right) = n, \quad \text{where } f_n \neq 0.$$

Thus the height is the degree of this differential operator. It can be seen from the reduction rules (2.6) (formally proven in a separate publication (Singh 2015)) that each commutator reduces height by one,

$$\text{ht}([\langle f \rangle_k, \langle g \rangle_l]) \leq k + l - 1,$$

for all $f, g \neq 0$ and $k, l \in \mathbb{N}_0$.

Norm of commutators. Since the differentiation matrices scale as $\mathcal{K}_k = \mathcal{O}(N^k)$ (where N is the number of grid points) and, upon discretisation, $\langle f \rangle_k = \mathcal{O}(N^k)$, the height of a term is a proxy for the norm upon discretisation. Consequently, height reduction leads to reduction of the norm of commutators,

$$\|[\langle f \rangle_k, \langle g \rangle_l]\|_2 = \mathcal{O}(N^{k+l-1}),$$

which is smaller (by one power of N) than the naive commutator estimate

$$\|[\langle f \rangle_k, \langle g \rangle_l]\|_2 \leq 2\|\langle f \rangle_k\|_2 \|\langle g \rangle_l\|_2 = \mathcal{O}(N^{k+l}).$$

Thus, the Magnus expansion is smaller in norm than naive commutator bounds suggest. This property has also been noted by (Hochbruck & Lubich 2002), although here it arises directly from algebraic observations.

Consequence for Lanczos iterations. Since the number of iterations in Lanczos exponentiation needs to be larger than the spectral radius of the exponent Θ_m before the superlinear decay of error kicks in, the reduction in spectral radius of the Magnus expansion leads to reduction of cost. In particular, it means that we can take larger time steps without making $\|\Theta_m(h)\|_2$ too large.

4 Numerical Examples

The initial condition for our numerical experiments is a Gaussian wavepacket

$$u_0(x) = (\delta\pi)^{-1/4} \exp((-x - x_0)^2/(2\delta)), \quad x_0 = -2.5, \quad \delta = 0.2,$$

sitting in the left well of a double well potential,

$$V_D(x) = x^4 - 20x^2.$$

We take $[-10, 10]$ as our spatial domain and $[0, 5]$ as our temporal domain. When we allow the wave function to evolve under V_D , it remains largely confined to the left well at the final time, $T = 5$ (see Figure 4.2, top left). Superimposing a time dependent

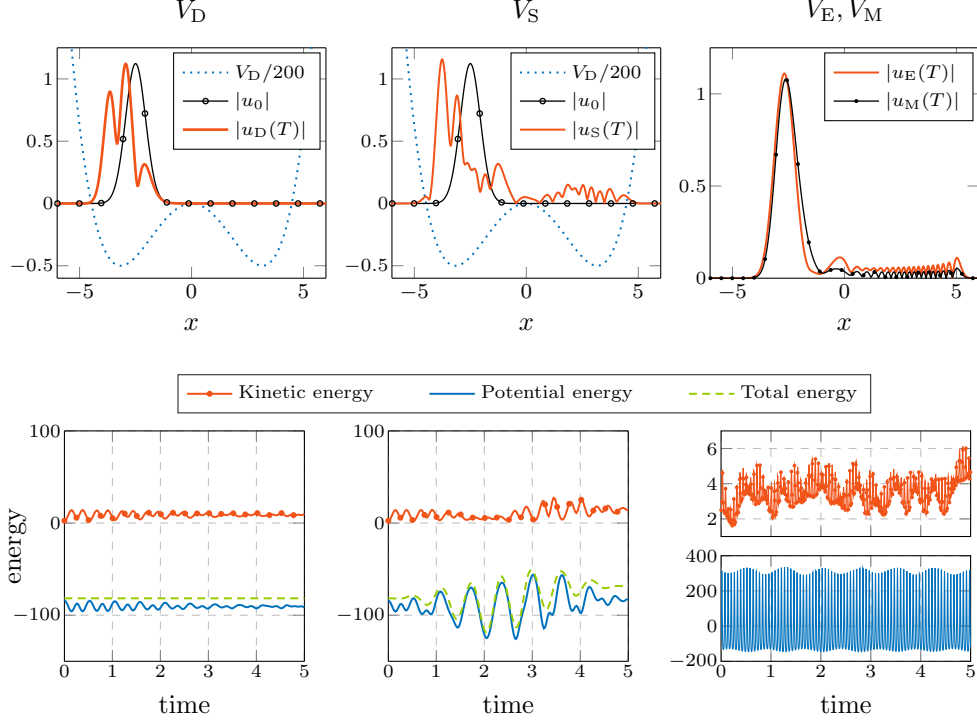


Figure 4.2: **[top row]** The initial condition u_0 evolves to u_D under the influence of V_D (left), to u_S under V_S (centre) and to u_E and u_M under V_E and V_M , respectively (right). The potential V_D is scaled down for ease of presentation. **[bottom row]** Corresponding evolution of energies.

excitation to the potential, we are able to exert control on the wave function. In Figure 4.2 (top centre and right) we show the influence of two excitations of the form $f(t)x$ with the choices $f(t) = 10 S_{10,T}(t)$ and $f(t) = -25 E_{100}(t)$, where

$$S_{\omega,T}(t) = \sin((\pi t/T)^2) \sin(\omega t), \quad E_{\omega,T}(t) = \exp(2 \sin(\omega t)) - 1.$$

The effective time-varying potentials in these cases are

$$V_S(x, t) = V_D(x) + 10 S_{10,T}(t)x, \quad V_E(x, t) = V_D(x) - 25 E_{100}(t)x,$$

respectively. Since the potentials are available in their analytic form, we use analytic derivatives in our implementation. The integrals were approximated via three Gauss–Legendre knots, as outlined in Section 3.2. In principle we can also use analytic or asymptotic approximations for the integrals. Potential accuracy advantages of resorting to analytic approximations should become evident by comparing with a higher degree quadrature – for this purpose we also present results using eleven Gauss–Legendre knots.

Mean field approximation (V_M). The excitation in V_S features a low frequency oscillation at $\omega = 10$, while V_E has a higher frequency oscillation, $\omega = 100$. In the

limit $\omega \rightarrow \infty$ the effect of the potential function can be approximated by a mean field potential⁵ and it is worth finding out to what extent this approximation suffices for V_E . Since $\int_0^5 E_{100}(t) dt \approx 6.45083$, the (time-independent) mean field potential is roughly

$$V_M(x) = V_{DW}(x) - 32.25415x.$$

In Figure 4.2 (top right) it is evident that the mean field solution $u_M(T)$ is not a sufficiently accurate approximation to $u_E(T)$, and at $\omega = 100$ we do require a solution via high-order Magnus based methods.

Magnus–expm. In the numerical experiments presented in this section, order four and six traditional Magnus expansions are denoted by M_4 and M_6 , respectively, while the corresponding commutator-free Magnus expansions are denoted by C_4 and C_6 , respectively. The order four methods use two Gauss–Legendre quadrature knots, while order six methods use three knots. All these methods use 180 spatial grid points and are exponentiated using MATLAB’s `expm`. We present the errors for these Magnus–`expm` methods in order to study the error inherent in the Magnus expansion separately from the error due to Lanczos iterations.

Higher accuracy quadratures. In a high frequency regime, we encounter more oscillations per time step and three quadrature knots can be inadequate for approximating the integrals adequately. In such cases, we can expect to see a considerable advantage when using analytic integrals, asymptotic approximations or higher accuracy quadratures. This behaviour is exhibited in Figure 4.4, where our order six integral preserving Magnus expansion C_6 is seen to have a much higher accuracy than the standard Magnus expansion M_6 , particularly when combined with a higher accuracy approximation to the integrals. In this case, we resort to 11 Gauss–Legendre quadratures, denoted by the postfix G_{11} . Analytic integrals could possibly improve the accuracy further, as could highly oscillatory quadrature methods (Deaño, Huybrechs & Iserles 2018), which can be easily transplanted to this setting.

Magnus–Lanczos. In Figure 4.3 (right) and Figure 4.4 (right) we show the errors in exponentiating the order six commutator-free and standard Magnus expansions via 50, 20 and 10 Lanczos iterations respectively. The Magnus–Lanczos schemes with n Lanczos iterations are denoted with the postfix L_n . It is evident from these figures that exponentiation of Magnus expansions via Lanczos iterations requires either a larger number of Lanczos iterations or smaller time steps before we achieve the accuracy inherent in the Magnus expansion (i.e. the accuracy of brute force exponentiation, M_6 and C_6).

Figures 4.3 (right) and 4.4 (right) suggest that there is scope for improvement in the efficient exponentiation of Magnus expansions, particularly when it comes to large time steps, which can be crucial for long term integration. In particular, it is worth exploring whether Zassenhaus splittings confer an advantage here.

The convergence of Lanczos approximation to the exponential can be very sensitive to the degree of spatial discretisation. $M_6L_{50}H$, in Figure 4.3 was run using 1024 grid points. Not only are the Lanczos iterations more expensive in this case, but the convergence also occurs much later. In general we need more iterations since the spectral radius of the Magnus expansion is larger (growing quadratically with finer

⁵Effectively the first and trivial Magnus expansion Θ_1 .

spatial resolution).

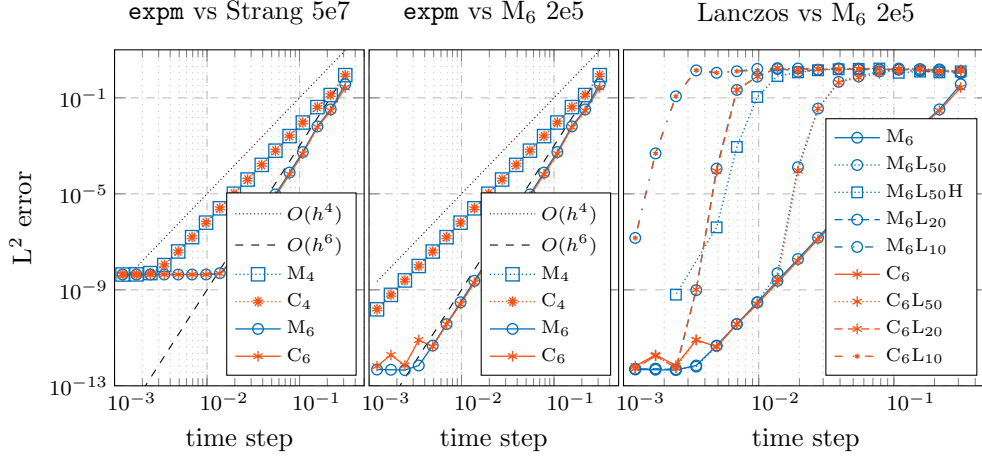


Figure 4.3: **[Low oscillation regime (V_S)]:** When applied to the low oscillatory regime of V_S , the order four and order six commutator-free Magnus expansions, C_4 and C_6 , have a similar error as the standard Magnus expansions, M_4 and M_6 . Not much difference is made in this case (V_S) by considering higher-order quadrature. On the left we use a Strang splitting (exponential midpoint rule) with 1024 grid points and 5×10^7 time steps as a reference. As we can see, the errors saturate around 10^{-8} , which is the accuracy of this reference solution. For the other two plots we use M_6 with 180 grid points and 2×10^5 time steps.

Remark 11 Note that, for potentials of the form $V(x, t) = V_0(x) + f(t)x$, the terms involving $\mu_{1,1}(h)$, $\mu_{2,1}(h)$ and $\mu_{3,1}(h)$ all vanish. This property, however, has not been exploited in the results presented here.

5 Conclusions

In this paper we have presented the derivation of integral-preserving, commutator-free Magnus–Lanczos methods (of arbitrarily high orders) for the computation of the Schrödinger equation featuring time-dependent potentials (1.1) under the atomic scaling, $\hbar = 1$. In particular, we have presented the 4th and 6th order methods ((2.21) and (2.28–2.29), respectively) and analysed their complexity in terms of the number of FFTs required in each Lanczos iteration (see (3.9)).

We find that the number of FFTs is much smaller than for standard Magnus expansions where commutators appear explicitly – our sixth-order method, for instance, requires merely 8 FFTs for each Lanczos iteration. This speedup is evident in numerical experiments (see Figure 4.5, where we find that our method is roughly 7 to 9 times faster than standard Magnus–Lanczos methods). Moreover, the number of FFTs can be shown to grow linearly with the order of the method we seek, so that the 8th order

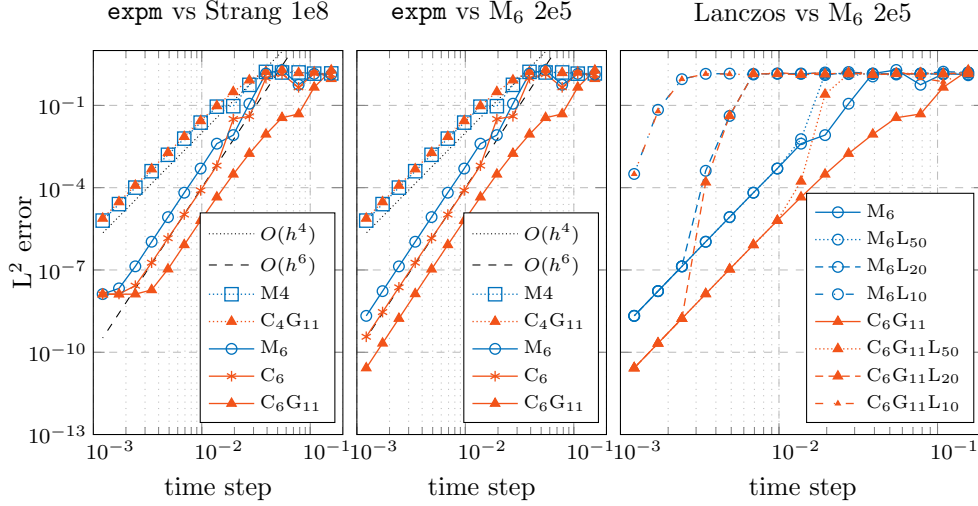


Figure 4.4: [**Highly oscillatory regime** (V_E)]: In the highly oscillatory regime of V_E , we also include the 11 Gauss–Legendre quadrature knots versions of C_4 and C_6 , which are labeled with the postfix G_{11} . A significant difference is made in this case (V_E) by considering higher-order quadrature. Analytic expressions for integrals could be beneficial in such cases. On the left we use a Strang splitting (exponential midpoint rule) with 512 grid points and 10^8 time steps as a reference. For the other two plots we use M_6 with 180 grid points and 2×10^5 time steps for the reference solution.

method in this class of methods would require 10 FFTs and have a more pronounced speedup over the standard Magnus expansion of order 8.

A concrete example of discretising the integrals via Gauss–Legendre quadrature is also presented in (3.3–3.8). However, as stressed throughout, one of the major advantages of our approach is the flexibility of choosing the method for approximating the integrals at the very last stage. This is likely to prove highly beneficial in the case of highly oscillatory potentials.

To illustrate this advantage, we present a numerical example featuring a highly oscillatory potential, V_E , in Section 4. Here we find that our order-six Magnus expansion using three Gauss–Legendres knots is roughly six times more accurate than the standard Magnus expansion. This is improved significantly by resorting to eleven Gauss–Legendre knots, resulting in the accuracy being roughly 80 times higher than the standard Magnus expansion (see Figure 4.4). It should be possible to improve upon the accuracy and cost further by using analytic integrals, asymptotic approximations or specialised highly-oscillatory quadrature.

We remind the reader that the accuracy inherent in the Magnus expansion (as evident via direct exponentiation) is only reflected in the Magnus–Lanczos methods when combined with a sufficient number of Lanczos iterations (see Figure 4.3 (right) and Figure 4.4 (right)). This is not much of a constraint when we need high accuracy

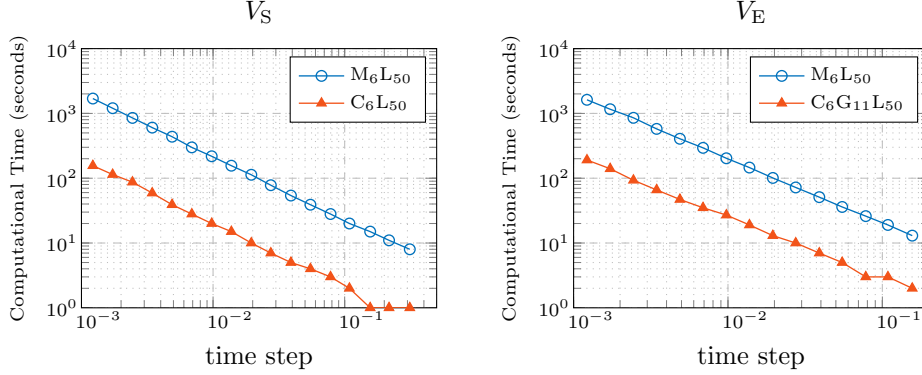


Figure 4.5: [**Computational Time (V_S, V_E)**]: The absence of nested commutators in our commutator-free Magnus expansions results in a significant improvement in computational time of a corresponding Magnus–Lanczos scheme (C_6L_{50} is roughly 7 to 9 times faster here than M_6L_{50}). This effect becomes more pronounced once we consider higher-order Magnus expansions.

but can afford to work with moderately large to small time steps since a reasonable number of Lanczos iterations suffices in this regime. However, in applications where cost constraints trump accuracy requirements and necessitate significantly larger time steps, the number of Lanczos iterations required might become a concern. In these regimes, asymptotic splittings such as symmetric Zassenhaus might be found to be more effective than Lanczos iterations for the exponentiation of Magnus expansions.

References

- Abramowitz, M. & Stegun, I. A. (1964), *Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables*, ninth Dover printing, 10th GPO printing edn, Dover, New York.
- Alvermann, A. & Fehske, H. (2011), ‘High-order commutator-free exponential time-propagation of driven quantum systems’, *J. Comput. Phys.* **230**(15), 5930–5956.
- Bader, P., Iserles, A., Kropielnicka, K. & Singh, P. (2014), ‘Effective approximation for the semiclassical Schrödinger equation’, *Found. Comput. Math.* **14**, 689–720.
- Bader, P., Iserles, A., Kropielnicka, K. & Singh, P. (2016), ‘Efficient methods for linear schrödinger equation in the semiclassical regime with time-dependent potential’, *Proc. R. Soc. A*.
- Blanes, S., Casas, F. & Thalhammer, M. (2017), ‘Convergence analysis of high-order commutator-free quasi-magnus exponential integrators for non-autonomous linear evolution equations of parabolic type’, *to appear*.

- Davis, P. J. & Rabinowitz, P. (1984), *Methods of Numerical Integration*, 2nd edn, Academic Press, Orlando, FL.
- Deaño, A., Huybrechs, D. & Iserles, A. (2018), *Computing Highly Oscillatory Integrals*, SIAM, Philadelphia.
- Gallopoulos, E. & Saad, Y. (1992), ‘Efficient solution of parabolic equations by Krylov approximation methods’, *SIAM J. Sci. Statist. Comput* **13**, 1236–1264.
- Hochbruck, M. & Lubich, C. (1997), ‘On Krylov subspace approximations to the matrix exponential operator’, *SIAM J. Numer. Anal.* **34**, 1911–1925.
- Hochbruck, M. & Lubich, C. (2002), ‘On Magnus integrators for time-dependent Schrödinger equations’, *SIAM J. Numer. Anal.* **41**, 945–963.
- Iserles, A. & Nørsett, S. P. (1999), ‘On the solution of linear differential equations in Lie groups’, *Phil. Trans. Royal Soc. A* **357**, 983–1020.
- Iserles, A., Munthe-Kaas, H. Z., Nørsett, S. P. & Zanna, A. (2000), ‘Lie-group methods’, *Acta Numerica* **9**, 215–365.
- Iserles, A., Nørsett, S. P. & Rasmussen, A. (2001), ‘Time symmetry and high-order Magnus methods’, *Appl. Numer. Math.* **39**(3–4), 379–401.
- Kormann, K., Holmgren, S. & Karlsson, H. O. (2008), ‘Accurate time propagation for the Schrödinger equation with an explicitly time-dependent Hamiltonian’, *J. Chem. Phys.*
- Lehmer, D. H. (1988), ‘A new approach to Bernoulli polynomials’, *Am. Math. Monthly* **95**(10), 905–911.
- Magnus, W. (1954), ‘On the exponential solution of differential equations for a linear operator’, *Comm. Pure Appl. Math.* **7**, 649–673.
- Moan, P. C. & Niesen, J. (2008), ‘Convergence of the Magnus series’, *Found. Comput. Math.* **8**(3), 291–301.
- Shapiro, M. & Brumer, P. (2003), *Principles of the Quantum Control of Molecular Processes*, Wiley-Interscience, Hoboken, N.J.
- Singh, P. (2015), Algebraic theory for higher order methods in computational quantum mechanics, arXiv:1510.06896 [math.NA].
- Singh, P. (2017), High accuracy computational methods for the semiclassical Schrödinger equation, PhD thesis, University of Cambridge.
- Tal-Ezer, H., Kosloff, R. & Cerjan, C. (1992), ‘Low-order polynomial approximation of propagators for the time-dependent Schrödinger equation’, *J. Comput. Phys.* **100**(1), 179–187.

A Quadrature weights

Once we have the values of V at the set of knots K , the integrals over the triangle can be approximated via (3.8),

$$\Lambda[f]_{a,b}(h) \rightsquigarrow \sum_{j \in K} \sum_{k \in K} w_{jk}^f [\mathcal{K}_a \mathbf{V}(\tau_j)] [\mathcal{K}_b \mathbf{V}(\tau_k)] \text{ or } \sum_{j \in K} \sum_{k \in K} w_{jk}^f [\partial_{\mathbf{x}}^a \mathbf{V}(\tau_j)] [\partial_{\mathbf{x}}^b \mathbf{V}(\tau_k)],$$

depending on whether exact derivatives $\partial_x^a V$ and $\partial_x^b V$ are available or not (in the latter case we resort to numerical differentiation via $\mathcal{K}_a$ and $\mathcal{K}_b$). As usual, boldface denotes a vector of values resulting from spatial discretisation. The weights required for three Gauss–Legendre quadrature knots for the functions $\psi, \varphi_1, \varphi_2, \phi_1$ and ϕ_2 are

$$\begin{aligned} w^\psi &= \left(\frac{h}{6}\right)^3 \left\{ \frac{1}{63} \begin{pmatrix} -139 & 26 & 239 \\ 26 & -304 & 26 \\ 239 & 26 & -139 \end{pmatrix} + 5\sqrt{\frac{3}{5}} \begin{pmatrix} 0 & 0 & -1 \\ 0 & 0 & 0 \\ 1 & 0 & 0 \end{pmatrix} \right\}, \\ w^{\varphi_1} &= \frac{2}{7} \left(\frac{h}{6}\right)^4 \left\{ \begin{pmatrix} -11 & -62 & 136 \\ 190 & -128 & 190 \\ 136 & -62 & -11 \end{pmatrix} + \sqrt{\frac{3}{5}} \begin{pmatrix} 175 & 58 & -170 \\ 222 & 0 & -222 \\ 170 & -58 & -175 \end{pmatrix} \right\}, \\ w^{\varphi_2} &= 2 \left(\frac{h}{6}\right)^4 \left\{ \begin{pmatrix} -5 & -14 & 10 \\ -2 & -32 & -2 \\ 10 & -14 & -5 \end{pmatrix} + \frac{1}{7} \sqrt{\frac{3}{5}} \begin{pmatrix} 145 & 134 & -90 \\ -46 & 0 & 46 \\ 90 & -134 & -145 \end{pmatrix} \right\}, \\ w^{\phi_1} &= \frac{2}{7} \left(\frac{h}{6}\right)^4 \left\{ \begin{pmatrix} -17 & 160 & -143 \\ -92 & 184 & -92 \\ -143 & 160 & -17 \end{pmatrix} + 6\sqrt{\frac{3}{5}} \begin{pmatrix} 25 & -34 & 30 \\ -16 & 0 & 16 \\ -30 & -34 & -25 \end{pmatrix} \right\}, \\ w^{\phi_2} &= \left(\frac{h}{6}\right)^4 \left\{ 6 \begin{pmatrix} 3 & 0 & -3 \\ -4 & 8 & -4 \\ -3 & 0 & 3 \end{pmatrix} + \frac{4}{7} \sqrt{\frac{3}{5}} \begin{pmatrix} 25 & -2 & 40 \\ -48 & 0 & 48 \\ -40 & 2 & -25 \end{pmatrix} \right\}. \end{aligned}$$